

RC RODCRAFT®



TOOLS AND WORKSHOP
EQUIPMENT 2017-2018



QUALITY FOR PROFESSIONALS



RC2277

01| Tightening

| Impact wrenches

- 1/4" Impact wrenches
- 3/8" Impact wrenches
- 1/2" Impact wrenches
- 3/4" Impact wrenches
- 1" Impact wrenches
- 1 1/2" Impact wrenches

| Ratchets

- 1/4" Ratchets
- 3/8" Ratchets
- 1/2" Ratchets

| Accessories

- Safety gloves
- Impact sockets

01

02

03

04

05

06

07

08

09

10

11

12

13

14

15


16

17

18

19

20



Model Part#
RC2077 8951000117
RC2077K 8951000145

Model Part#
RC2003 8951000195
RC2101 8951000196

| Model | RC2077 | |
|-----------------|--------|-------------------------|
| Anvil | | 1/4" |
| Working Torque | | 40 Nm |
| Max Torque | | 60 Nm |
| Speed | | 14000 min ⁻¹ |
| Weight | | 0.69 kg |
| Hose | | 8 mm |
| Dimension axbxc | | 150x140x40 mm |
| Air cons. | | 200 l/min |
| Air cons. | | 390 l/min |
| Air inlet | | 1/4" IG |
| Impact system | | SINGLE HAMMER |
| Sound LpA | | 87.6 dB(A) |
| Vibration | | 5.92 m/s ² |

60 Nm max.

| Model | RC2003 | RC2101 |
|-----------------|--------|-------------------------|
| Anvil | | 1/4" 3/8" |
| Working Torque | | 60 Nm |
| Max Torque | | 110 Nm |
| Speed | | 15000 min ⁻¹ |
| Weight | | 0.53 kg |
| Hose | | 8 mm |
| Dimension axbxc | | 140x.x40 mm |
| Air cons. | | 42 l/min |
| Air cons. | | 174 l/min |
| Air inlet | | 1/4" IG |
| Impact system | | DOUBLE ROCKING DOG |
| Sound LpA | | 92 dB(A) |
| Vibration | | 4 m/s ² |

110 Nm max.



- 1/4" square drive impact wrench
- 60 Nm in reverse
- Ergonomic handle with injected TPR grip
- One hand forward – reverse switch
- 0.69 Kg – 150 mm length



- 140 mm length, provides easier access to hard to reach places
- 1.16 lbs. / 0.53 Kg
- 80 ft.lbs. / 110 Nm in reverse


16 pc 1/4" socket set

Model Part#
RC2077K 8951000145

- RC2077
- 1/4" 6 Point impact sockets: 8 - 9 - 10 - 11 - 12 mm
- 1/4" 50 mm long Torx bits: T15 - T20 - T25 - T30 - T40
- 1/4" 50 mm hexagonal bits: 5 - 6 - 8 - 10 mm
- 1/4" square to 3/8" hexagonal adaptor
- 1/4" quick change bit holder



IMPACT WRENCH 1/2"



| Model | Part# |
|--------|-----------|
| RC2177 | 895100043 |
| RC2267 | 895100044 |

| Model | Part# |
|--------|-----------|
| RC2205 | 895100085 |

| Model | Part# |
|--------|------------|
| RC2202 | 8951000123 |

| Model | RC2177 | RC2267 |
|-----------------|------------------------|-------------------------|
| Anvil | 3/8" | 1/2" |
| Working Torque | 420 Nm | 480 Nm |
| Max Torque | 580 Nm | 660 Nm |
| Speed | 8200 min ⁻¹ | 10200 min ⁻¹ |
| Weight | 1.25 kg | |
| Hose | 8 mm | |
| Dimension axbxc | 164x175x60 mm | |
| Air cons. | 160 l/min average | 180 l/min |
| Air cons. | 470 l/min cont. | 510 l/min |
| Air inlet | 1/4" IG | |
| Impact system | DUOPACT | |
| Sound LpA | 90 dB(A) | 93 dB(A) |
| Vibration | 7.9 m/s ² | 6.9 m/s ² |

580 & 660 Nm max. Composite - Only 1,25 kg

| Model | RC2205 |
|-----------------|------------------------|
| Anvil | 1/2" |
| Working Torque | 406 Nm |
| Max Torque | 580 Nm |
| Speed | 7800 min ⁻¹ |
| Weight | 2.4 kg |
| Hose | 10 mm |
| Dimension axbxc | 150x140x40 mm |
| Air cons. | 130 l/min average |
| Air cons. | 350 l/min cont. |
| Air inlet | 1/4" IG |
| Impact system | PIN CLUTCH |
| Sound LpA | 87,4 dB(A) |
| Vibration | 6,71 m/s ² |

580 Nm max.

| Model | RC2202 |
|-----------------|------------------------|
| Anvil | 1/2" |
| Working Torque | 420 Nm |
| Max Torque | 610 Nm |
| Speed | 9000 min ⁻¹ |
| Weight | 1.3 kg |
| Hose | 10 mm |
| Dimension axbxc | 112x175x60 mm |
| Air cons. | 225 l/min average |
| Air cons. | 540 l/min cont. |
| Air inlet | 1/4" IG |
| Impact system | JUMBO HAMMER |
| Sound LpA | 95 dB(A) |
| Vibration | 12.1 m/s ² |

610 Nm max. Only 1,3 kg



RODCRAFT
Premium

- Heavy duty impact wrench
- DUOPACT impact mechanism
- Composite lightweight motor housing
- Well balanced, insulating rubber areas on handle
- Robust F/R shift with 3 positions regulator in forward
- Full power in reverse
- A silencing exhaust hose can be attached



- 1/2" square drive impact wrench
- One hand operation with push-through forward-reverse shift
- 4 positions regulator in forward
- Full power in reverse - 580 Nm max,
- A silencing exhaust hose can be attached
- Rubber protector on front



- 1/2" Ultra compact impact wrench
- 610 Nm maximum torque in reverse
- Steel front cover & Aluminum body
- Length = 112 mm as can size
- Jumbo hammer mechanism
- 3 settings in both directions

Accessories for 3/8" impacts

| Model | Part# |
|--------|------------|
| RS3113 | 8951012354 |

- 3/8" square drive
- 13 pieces (7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19)

Accessories for 1/2" impacts

| Model | Part# |
|--------|------------|
| RS4114 | 8951012356 |

- 1/2" square drive
- 14 pieces (10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 26, 27)

Anti scratch protected


| Model | Part# |
|---------|------------|
| RS413WP | 8951012362 |



- 85 mm long 1/2" socket
- SW17 / 19 / 21 mm
- Extra thin-walled for alloy rims
- Impact proof chrome-molybdenum quality
- Individual sockets also available

01
02
03
04
05
06
07
08
09
10
11
12
13
14
15
16
17
18
19
20

IMPACT WRENCH 1/2"



Model Part#
RC2235 8951000286

Model Part#
RC2257 8951000037

Model Part#
RC2277 8951000025

| Model | RC2235 | |
|-----------------|--------|------------------------|
| Anvil | | 1/2" |
| Working Torque | | 220 Nm |
| Max Torque | | 300 Nm |
| Speed | | 7400 min ⁻¹ |
| Weight | | 1.85 kg |
| Hose | | 8 mm |
| Dimension axbxc | | 341x80x58 mm |
| Air cons. | | 81 l/min |
| Air cons. | | 408 l/min |
| Air inlet | | 1/4" IG |
| Impact system | | JUMBO HAMMER |
| Sound LpA | | 97 dB(A) |
| Vibration | | 43.5m/s ² |



300 Nm max.

| Model | RC2257 | |
|-----------------|--------|------------------------|
| Anvil | | 1/2" |
| Working Torque | | 680 Nm |
| Max Torque | | 950 Nm |
| Speed | | 8950 min ⁻¹ |
| Weight | | 2.5 kg |
| Hose | | 10 mm |
| Dimension axbxc | | 213x194x70 mm |
| Air cons. | | 200 l/min |
| Air cons. | | 610 l/min |
| Air inlet | | 1/4" IG |
| Impact system | | DUOPACT |
| Sound LpA | | 94 dB(A) |
| Vibration | | 6.8 m/s ² |

950 Nm max.

| Model | RC2277 | |
|-----------------|--------|------------------------|
| Anvil | | 1/2" |
| Working Torque | | 900 Nm |
| Max Torque | | 1250 Nm |
| Speed | | 8200 min ⁻¹ |
| Weight | | 2 kg |
| Hose | | 10 mm |
| Dimension axbxc | | 194x188x70 mm |
| Air cons. | | 245 l/min |
| Air cons. | | 760 l/min |
| Air inlet | | 1/4" IG |
| Impact system | | DUOPACT |
| Sound LpA | | 93 dB(A) |
| Vibration | | 9.7 m/s ² |

1250 Nm max.



- Handle with ergonomic grip
- Full teasing trigger
- Torque selection
- Easy forward reverse selection

- 1/2" square drive impact wrench
- One hand operation
- 3+3 position regulator and F/R shift
- 950 Nm max, power in reverse
- A silencing exhaust hose can be attached
- Long handle

- 1/2" square drive impact wrench
- 1250 Nm maximum real torque in reverse
- The Beast Aluminum alloy clutch housing
- Twin hammer mechanism
- Friction ring socket retainer
- Full teasing trigger
- Curved handle with Thermo-Plastic Rubber injected in housing for a durable and comfortable grip, Resistant to most chemicals used in workshops
- NEW power setting system : 1 hand-operation, 1 position in reverse & 3 positions in forward
- 360° swivel air inlet



Model Part#
RC2257K 8951000089

- 1/2" impact set including:
- 1 RC2257 1/2" square drive impact wrench
- 1/2" square drive short impact socket set in case with hex sizes: 10 / 11 / 12 / 13 / 14 / 15 / 16 / 17 / 18 / 19 / 21 / 22 / 26 / 27 mm
- Oil bottle
- Hex key for maintenance



Anti scratch protected

Model Part#
RS414WP 8951012363

- 85 mm long 1/2" socket
- SW17 / 19 / 21 / 22 mm
- Extra thin-walled for alloy rims
- Impact proof chrome-molybdenum quality
- Individual sockets also available



Model Part#
RC2277K 8951000182

- RC2277 Long Protected sockets: 17 - 19 & 21 mm





- 01
- 02
- 03
- 04
- 05
- 06
- 07
- 08
- 09
- 10
- 11
- 12
- 13
- 14
- 15
- 16
- 17
- 18
- 19
- 20

**DUOPACT
impact system**

1250 NM MAX TORQUE




**Grease nipple
easy to access**

**High quality, low weight
composite housing**

**Thermo-plastic-rubber
coated handle for full grip**

RC2277



Model Part#
RC2315 8951077130

Model Part#
RC2377 8951000045 short anvil
RC2387 8951000074 long anvil

| Model | RC2315 | |
|-----------------|--------|------------------------|
| Anvil | | 3/4" |
| Working Torque | | 1100 Nm |
| Max Torque | | 1500 Nm |
| Speed | | 5600 min ⁻¹ |
| Weight | | 4.7 kg |
| Hose | | 13 mm |
| Dimension axbxc | | 242x230x78 mm |
| Air cons. | | 340 l/min |
| Air cons. | | 990 l/min |
| Air inlet | | 3/8" IG |
| Impact system | | DUOPACT |
| Sound LpA | | 91.1 dB(A) |
| Vibration | | 9.97 m/s ² |

1500 Nm max.

| Model | RC2377 / RC2387 | |
|-----------------|------------------|--------------------------------|
| Anvil | | 3/4" |
| Working Torque | | 1300 Nm |
| Max Torque | | 1950 Nm |
| Speed | | 5760 min ⁻¹ |
| Weight | | 3.5 / 4.1 kg |
| Hose | | 13 mm |
| Dimension axbxc | RC2377 RC2387 | 225x84x199 mm 300x84x199 mm |
| Air cons. | | 255 l/min |
| Air cons. | | 972 l/min |
| Air inlet | | 3/8" IG |
| Impact system | | DUOPACT |
| Sound LpA | | 96.8 dB(A) |
| Vibration | | 14.5 m/s ² |

1950 Nm max.



- 3/4" square drive impact wrench
- DUOPACT mechanism
- 3 position regulator in forward
- Full power in reverse
- Insulating rubber sleeve on handle



RODCRAFT
Premium



- 3/4" square drive impact wrench
- Injected TPR grip
- 3 positions in forward, full power in reverse
- Great teasing for optimal control
- 1950 Nm max torque
- Composite housing, only 3,5 kg even at this high power level
- Forged DUOPACT mechanism
- Impact mechanism housing made of steel and aluminium
- Swivel air inlet
- Mini grease plug on the front housing

Accessories for 3/4" impacts

Model Part#
RS618 8951012358




- 3/4" square drive
- 8 pieces
- (26, 27, 29, 30, 32, 35, 36, 38)

RC2387
Anvil extension 75mm



IMPACT WRENCH 1"



Model Part#
RC2405 8951000075

Model Part#
RC2425 8951077190 short anvil
RC2426 8951077032 long anvil

Model Part#
RC2437-Xi 8951000068 short anvil
RC2447-Xi 8951000069 long anvil

| Model | RC2405 | |
|-----------------|--------|------------------------|
| Anvil | | 1" |
| Working Torque | | 1300 Nm |
| Max Torque | | 1950 Nm |
| Speed | | 5760 min ⁻¹ |
| Weight | | 3.6 kg |
| Hose | | 13 mm |
| Dimension axbxc | | 221x84x199 mm |
| Air cons. | | 255 l/min |
| Air cons. | | 972 l/min |
| Air inlet | | 3/8" IG |
| Impact system | | DUOPACT |
| Sound LpA | | 96.8 dB(A) |
| Vibration | | 14.5 m/s ² |

1950 Nm max.

| Model | RC2425 / RC2426 | |
|-----------------|-----------------|------------------------|
| Anvil | | 1" |
| Working Torque | | 1715 Nm |
| Max Torque | | 2450 Nm |
| Speed | | 3200 min ⁻¹ |
| Weight | | 9.4 kg / 10.6 kg |
| Hose | | 13 mm |
| Dimension axbxc | RC2425 | 312x270x119 mm |
| | RC2426 | 460x270x119 mm |
| Air cons. | | 370 l/min |
| Air cons. | | 1020 l/min |
| Air inlet | | 1/2" IG |
| Impact system | | SINGLE HAMMER |
| Sound LpA | | 97.9 dB(A) |
| Vibration | | 14.93 m/s ² |

2450 Nm max.

| Model | RC2437Xi / RC2447Xi | |
|-----------------|---------------------|------------------------|
| Anvil | | 1" |
| Working Torque | | 1900 Nm |
| Max Torque | | 2700 Nm |
| Speed | | 6000 min ⁻¹ |
| Weight | | 7.2 kg / 8.3 kg |
| Hose | | 13 mm |
| Dimension axbxc | RC2437Xi | 275x158x245 mm |
| | RC2447Xi | 490x165x190 mm |
| Air cons. | | 360 l/min |
| Air cons. | | 1100 l/min |
| Air inlet | | 1/2" IG |
| Impact system | | DUOPACT |
| Sound LpA | | 100.8 dB(A) |
| Vibration | | 10.7 m/s ² |

2700 Nm max.



- 1" square drive impact wrench
- Injected TPR grip
- 3 positions in forward, full power in reverse
- Great teasing for optimal control
- 1950 Nm max torque
- Composite housing, only 3,38 kg even at this high power level
- Forged DUOPACT mechanism
- Impact mechanism housing made of steel and aluminum
- Swivel air inlet
- Mini grease plug on the front housing



- 1" square drive impact wrench
- 3+3 position regulator incorporating F/R shift
- 2450 Nm max, power in reverse
- A silencing exhaust hose can be attached
- Rubber protector on front



- 1" square drive impact wrench
- Injected TPR grip
- 3 steps forward and 2 steps in reverse
- Ergonomic trigger with great teasing for optimal control
- 2700 Nm max torque
- Composite housing, only 7,2 kg even at this high power level
- Fast and high torque with forged DUOPACT mechanism

Model Part#
RDP10 8951011021

- Digital tyre gauge
- perfect for your coat pocket
- LCD display
- effective range up to 10 bar/150 psi
- Display in bar or psi




RC2426
 with long anvil
 (152 mm)



RC2447Xi
 with long anvil
 (152 mm)



IMPACT WRENCH 1"

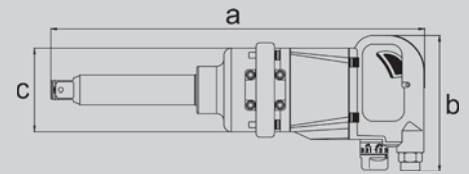

Model Part#
RC2466 8951000047 short anvil
RC2476 8951000048 long anvil

Model Part#
RC2457Xi 8951000135 short anvil
RC2477Xi 8951000046 long anvil

Model Part#
RC2444 8951077210

| Model | RC2466 / RC2476 | |
|-----------------|------------------|----------------------------------|
| Anvil | | 1" |
| Working Torque | | 2000 Nm |
| Max Torque | | 2900 Nm |
| Speed | | 5150 min ⁻¹ |
| Weight | | 10.1 kg / 11.6 kg |
| Hose | | 13 mm |
| Dimension axbxc | RC2466 RC2476 | 370x186x130 mm 520x186x130 mm |
| Air cons. | | 370 l/min |
| Air cons. | | 1150 l/min |
| Air inlet | | 1/2" IG |
| Impact system | | CLOSED HAMMER |
| Sound LpA | | 100 dB(A) |
| Vibration | | 6.5 m/s ² |

2900 Nm max.

| Model | RC2457Xi / RC2477Xi | |
|-----------------|----------------------|---------------------------------|
| Anvil | | 1" |
| Working Torque | | 2000 Nm |
| Max Torque | | 2900 Nm |
| Speed | | 5900 min ⁻¹ |
| Weight | | 7.2 kg / 8.1 kg |
| Hose | | 13 mm |
| Dimension axbxc | RC2457Xi RC2477Xi | 337x165x190 mm 490x165x89 mm |
| Air cons. | | 300 l/min |
| Air cons. | | 920 l/min |
| Air inlet | | 1/2" IG |
| Impact system | | DUOPACT |
| Sound LpA | | 106 dB(A) |
| Vibration | | 9.8 m/s ² |

2900 Nm max.

| Model | RC2444 | |
|-----------------|--------|------------------------|
| Anvil | | 1" |
| Working Torque | | 2450 Nm |
| Max Torque | | 3500 Nm |
| Speed | | 2700 min ⁻¹ |
| Weight | | 14.6 kg |
| Hose | | 13 mm |
| Dimension axbxc | | 325x300x121 mm |
| Air cons. | | 400 l/min |
| Air cons. | | 1120 l/min |
| Air inlet | | 3/8" IG |
| Impact system | | CLOSED HAMMER |
| Sound LpA | | 104 dB(A) |
| Vibration | | 9.17 m/s ² |

3500 Nm max.



- 1" heavy duty impact wrench
- Extremely durable CLOSED HAMMER SYSTEM
- 3+3 position regulator incorporating F/R shift
- 2900 Nm max, power in reverse

RC2476
with long anvil
(152 mm)



- 1" super power impact wrench
- Lightweight motor housing
- Long anvil
- DUOPACT mechanism
- Very slim front - diameter 89 mm
- 3+3 position regulator incorporating F/R shift
- 2900 Nm max, power in reverse
- Ergonomic and insulating rubber areas on handles
- Rubber cover on the motor housing

RC2477Xi
with long anvil
(152 mm)



- 1" super power impact wrench
- Extremely durable CLOSED HAMMER SYSTEM
- 4+4 position regulator and F/R shift
- 3500 Nm max, power in reverse


Accessories for 1" impacts

Model Part#
RS818 8951012360



- 1" square drive
- 8 pieces
(26, 27, 29, 30, 32, 35, 36, 38)

IMPACT WRENCH 1 1/2"

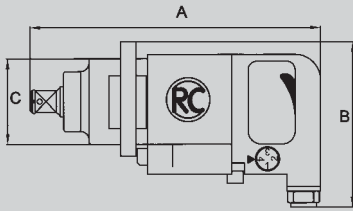

Model **Part#**
RC2530 **8951077260**

| | | |
|-----------------|--|------------------------|
| Model | | RC2530 |
| Anvil | | 1 1/2" |
| Working Torque | | 4200 Nm |
| Max Torque | | 5500 Nm |
| Speed | | 3600 min ⁻¹ |
| Weight | | 17.7 kg |
| Hose | | 19 mm |
| Dimension axbxc | | 520x190x123 mm |
| Air cons. | | 600 l/min |
| Air cons. | | 1800 l/min |
| Air inlet | | 1/2" IG |
| Impact system | | PIN CLUTCH |
| Sound LpA | | 97.1 dB(A) |
| Vibration | | 14.62 m/s ² |

5500 Nm max.




- 1 1/2" extreme power impact wrench with 4+4 position regulator and F/R shift
- 5500 Nm max. power in reverse

Impact Wrench Tune up Kit

| Model | Part# |
|-----------|------------|
| RC2277 | 8950280018 |
| RC2177 | 8950280024 |
| RC2177 | 8950280024 |
| RC2267 | 8950280024 |
| RC2466 | 8950280028 |
| RC2235 | 8950280081 |
| RC2257 DP | 8950280034 |
| RC2477XI | 8950280038 |
| RC2457XI | 8950280038 |
| RC2377 | 8950280043 |
| RC2387 | 8950280043 |
| RC2405 | 8950280043 |
| RC2205 | 8950280050 |
| RC2437XI | 8950280055 |
| RC2447XI | 8950280055 |
| RC2077 | 8950280058 |
| RC2277 | 8950280059 |
| RC2202 | 8940171649 |

RACHETS 1/4"



Model Part#
RC3000 8951078012

| Model | | RC3000 |
|------------------|--|-----------------------|
| Anvil | | 1/4" |
| Torque M | | 20 Nm |
| Torque Mmax | | 30 Nm |
| Speed | | 230 min ⁻¹ |
| Weight | | 0.55 kg |
| Hose | | 8 mm |
| Dimensions axbxc | | 180x35x31 mm |
| Air cons. | | 100 l/min |
| Air cons. | | 300 l/min |
| Air inlet | | 1/4" IG |
| Sound LpA | | 81.2 dB(A) |
| Vibration | | 3.91 m/s ² |

Motor 30 Nm max.



- 1/4" ratchet
- Length only 180 mm
- Rear exhaust

Model Part#
RC3001 8951078022

| Model | | RC3001 |
|------------------|--|-----------------------|
| Anvil | | 1/4" |
| Torque M | | 25 Nm |
| Torque Mmax | | 30 Nm |
| Speed | | 270 min ⁻¹ |
| Weight | | 0.44 kg |
| Hose | | 8 mm |
| Dimensions axbxc | | 140x35x30 mm |
| Air cons. | | 115 l/min |
| Air cons. | | 490 l/min |
| Air inlet | | 1/4" IG |
| Sound LpA | | 91.8 dB(A) |
| Vibration | | 3.49 m/s ² |

Only 140 mm



- 1/4" mini-ratchet for use in confined areas
- Anti-slip coated handle
- Rear exhaust

Model Part#
RC3060 8951078062

| Model | | RC3060 |
|------------------|--|-----------------------|
| Anvil | | 1/4" |
| Torque M | | 20 Nm |
| Torque Mmax | | 45 Nm |
| Speed | | 250 min ⁻¹ |
| Weight | | 0.65 kg |
| Hose | | 8 mm |
| Dimensions axbxc | | 205x42x32 mm |
| Air cons. | | 65 l/min |
| Air cons. | | 200 l/min |
| Air inlet | | 1/4" IG |
| Sound LpA | | 89.3 dB(A) |
| Vibration | | 2.89 m/s ² |

Closed head Motor 45 Nm max.



- 1/4" ratchet
- Flat, small ratchet head (32 mm) for confined areas
- Closed head design with 2 grease nipples for easy maintenance
- Pivotal air outlet, keeps air away from work
- Insulated handle

Model **Part#**
RC3005 *8951078042*

Model **Part#**
RC3010 *8951078013*

Model **Part#**
RC3260 *8951078033*

| Model | | RC3005 |
|-------------------------|--|-----------------------|
| Anvil | | 3/8" |
| Torque M | | 20 Nm |
| Torque Mmax | | 30 Nm |
| Speed | | 230 min ⁻¹ |
| Weight | | 0.55 kg |
| Hose | | 8 mm |
| Dimensions axbxc | | 180x35x33 mm |
| Air cons. | | 100 l/min |
| Air cons. | | 300 l/min |
| Air inlet | | 1/4" IG |
| Sound LpA | | 85.5 dB(A) |
| Vibration | | 4.29 m/s ² |
| Motor 30 Nm max. | | |

| Model | | RC3010 |
|-------------------------|--|-----------------------|
| Anvil | | 3/8" |
| Torque M | | 20 Nm |
| Torque Mmax | | 30 Nm |
| Speed | | 230 min ⁻¹ |
| Weight | | 0.55 kg |
| Hose | | 8 mm |
| Dimensions axbxc | | 205x35x33 mm |
| Air cons. | | 100 l/min |
| Air cons. | | 300 l/min |
| Air inlet | | 1/4" IG |
| Sound LpA | | 84.2 dB(A) |
| Vibration | | 4.08 m/s ² |
| Motor 30 Nm max. | | |

| Model | | RC3260 |
|-------------------------|--|-----------------------|
| Anvil | | 3/8" |
| Torque M | | 20 Nm |
| Torque Mmax | | 45 Nm |
| Speed | | 250 min ⁻¹ |
| Weight | | 0.65 kg |
| Hose | | 8 mm |
| Dimensions axbxc | | 205x42x34 mm |
| Air cons. | | 65 l/min |
| Air cons. | | 200 l/min |
| Air inlet | | 1/4" IG |
| Sound LpA | | 92.5 dB(A) |
| Vibration | | 3.23 m/s ² |
| Motor 45 Nm max. | | |




- 3/8" ratchet
- Length only 180 mm
- Rear exhaust

- 3/8" ratchet
- Length only 205 mm
- Rear exhaust

- 3/8" ratchet
- Flat, small ratchet head (32 mm) for confined areas
- Closed head design with 2 grease nipples for easy maintenance
- Pivotal air outlet, keeps air away from work
- Insulated handle


01
02
03
04
05
06
07
08
09
10
11
12
13
14
15
16
17
18
19
20

RATCHETS 3/8" & 1/2"



Model Part#
RC3200 8951078023

| Model | | RC3200 |
|-------------------------|--|-----------------------|
| Anvil | | 3/8" |
| Torque M | | 40 Nm |
| Torque Mmax | | 60 Nm |
| Speed | | 160 min ⁻¹ |
| Weight | | 1.2 kg |
| Hose | | 8 mm |
| Dimensions axbxc | | 255x47x42 mm |
| Air cons. | | 170 l/min |
| Air cons. | | 465 l/min |
| Air inlet | | 1/4" IG |
| Sound LpA | | 90.8 dB(A) |
| Vibration | | 3.39 m/s ² |
| Motor 60 Nm max. | | |



- 3/8" standard ratchet
- Front exhaust
- Good handle grip

Model Part#
RC3100 8951078004

| Model | | RC3100 |
|-------------------------|--|-----------------------|
| Anvil | | 1/2" |
| Torque M | | 40 Nm |
| Torque Mmax | | 60 Nm |
| Speed | | 160 min ⁻¹ |
| Weight | | 1.2 kg |
| Hose | | 8 mm |
| Dimensions axbxc | | 255x47x46 mm |
| Air cons. | | 170 l/min |
| Air cons. | | 465 l/min |
| Air inlet | | 1/4" IG |
| Sound LpA | | 93.2 dB(A) |
| Vibration | | 4.14 m/s ² |
| Motor 60 Nm max. | | |



- 1/2" standard ratchet
- Front exhaust
- Good handle grip

Model Part#
RC3600 8951078034

| Model | | RC3600 |
|-------------------------|--|-----------------------|
| Anvil | | 1/2" |
| Torque M | | 60 Nm |
| Torque Mmax | | 90 Nm |
| Speed | | 170 min ⁻¹ |
| Weight | | 1.25 kg |
| Hose | | 8 mm |
| Dimensions axbxc | | 275x43x49 mm |
| Air cons. | | 170 l/min |
| Air cons. | | 460 l/min |
| Air inlet | | 1/4" IG |
| Sound LpA | | 85.4 dB(A) |
| Vibration | | 4.95 m/s ² |
| Motor 90 Nm max. | | |



- Proven 1/2" air ratchet
- Rear exhaust
- Motor housing with its flattened sides has a perfect grip to allow good control of the tool

Model **Part#**
RC3607 **8951078114**

Model **Part#**
RC3700 **8951078074**

| | | |
|----------------------------------|--|-----------------------|
| Model | | RC3607 |
| Anvil | | 1/2" |
| Torque M | | 60 Nm |
| Torque Mmax | | 90 Nm |
| Speed | | 170 min ⁻¹ |
| Weight | | 1.25 kg |
| Hose | | 8 mm |
| Dimensions axbxc | | 270x44x49 mm |
| Air cons. | | 170 l/min |
| Air cons. | | 460 l/min |
| Air inlet | | 1/4" IG |
| Sound LpA | | 88.2 dB(A) |
| Vibration | | 4.32 m/s ² |
| Motor 90 Nm max. Composit | | |

| | | |
|---|--|-----------------------|
| Model | | RC3700 |
| Anvil | | 1/2" |
| Torque M | | 130 Nm |
| Torque Mmax | | 130 Nm (250H) Nm |
| Speed | | 320 min ⁻¹ |
| Weight | | 1.6 kg |
| Hose | | 8 mm |
| Dimensions axbxc | | 312x52x52 mm |
| Air cons. | | 130 l/min |
| Air cons. | | 830 l/min |
| Air inlet | | 1/4" IG |
| Sound LpA | | 92 dB(A) |
| Vibration | | 3.19 m/s ² |
| Motor 130 Nm (250H) max. DuoPawl | | |



- 1/2" air ratchet
- Ergonomic and powerful ratchet
- Cold-insulating composite handle
- Start lever sinks snugly into housing
- Simple to re-grease
- Rear exhaust



- 1/2" ratchet with 130 Nm motor power - by hand you can torque up to 250 Nm similar to using a spanner
- DUO-PAWL double ratchet pawl mechanism with 3-point-spring suspension for extreme torque and smooth operation with symmetrical blocking system
- Cold and vibration insulated handle
- Swiveling exhaust ring avoiding any disturbance from the exhausted air flow

01
02
03
04
05
06
07
08
09
10
11
12
13
14
15
16
17
18
19
20

Standard sockets in sets

Standard sockets with hex key, impact proof chrome-molybdenum quality, easy-to-read laser etched marking on each socket with model no. and key size

| 3/8" square | content size of hex mm | Part# |
|-------------|---|------------|
| RS3113 | 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19 | 8951012354 |



| 1/4" square | Part# |
|--|------------|
| 6 Point impact sockets 8, 9, 10, 11, 12 mm | |
| 1/4" 50 mm long Torx bits T15 - T20 - T25 - T30 - T40 | |
| RS2116 1/4" 50 mm hexagonal bits: 5 - 6 - 8 - 10 mm | 8951000146 |
| 1/4" square to 1/4" hexagonal adaptor | |
| 1/4" quick change bit holder | |



| 1/2" square | Part# |
|---|------------|
| RS4114 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 26, 27 | 8951012356 |

| 3/4" square | Part# |
|---|------------|
| RS618 26, 27, 29, 30, 32, 35, 36, 38 | 8951012358 |

| 1" square | Part# |
|---|------------|
| RS818 27, 30, 32, 33, 35, 36, 38, 41 | 8951012360 |

Deep sockets in sets

Deep sockets with hex key, for hard to reach areas

| 1/2" square | Part# |
|--|------------|
| RS4114D 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 26, 27 | 8951012357 |
| RS413DTW 17, 19, 21 | 8951012353 |

| 3/4" square | Part# |
|--|------------|
| RS618D 26, 27, 29, 30, 32, 35, 36, 38 | 8951012359 |

| 1" square | Part# |
|-----------------------|------------|
| RS814D 27, 32, 33, 36 | 8951012361 |



Individual deep sockets

Individual pieces of the most common sockets in the vehicle service business

| 1/2" square | content size of hex mm | Part# |
|------------------|------------------------|------------|
| R417MD | 17 | 8951012364 |
| R419MD | 19 | 8951012365 |
| R421MD | 21 | 8951012366 |
| 1" square | | |
| R833MD | 33 | 8951012370 |



Anti scratch

Sockets with hex key, with anti-scratch protection, extra thin-walled for alloy rims, painted rims and polished cap nuts, impact proof chrome-molybdenum quality, easy-to-read marking on each socket with key size. Options with 80 mm (deep) and 130 mm (long) for sports cars

Model Part#
RS413WP 8951012362 (length 80 mm)



| Model | content size of hex mm |
|---------|------------------------|
| RS413WP | 17, 19, 21 |

Model Part#
RS414WP 8951012363
 Similar features to the RS413WP (length 80 mm)



| Model | content size of hex mm |
|---------|------------------------|
| RS414WP | 17, 19, 21, 22 |

Model Part#
RS413LWP 8951000054
 Similar features to the RS413WP but length 130 mm



| Model | content size of hex mm |
|----------|------------------------|
| RS413LWP | 17, 19, 21 |

Individual pieces of the most common sockets in the tyre changing business

| Model | Length | Part# |
|---------|---------------|------------|
| R417MWP | short L=85 mm | 8951012372 |
| R417LWP | long L=130 mm | 8955000051 |
| R419MWP | short L=85 mm | 8951012373 |
| R419LWP | long L=130 mm | 8955000052 |
| R421MWP | short L=85 mm | 8951012374 |
| R421LWP | long L=130 mm | 8955000053 |

| Model | | Part# |
|---------|---------------------------------|------------|
| KSW21LK | PVC-sleeve for R421MWP (10 pcs) | 8951011404 |
| KSW22LK | PVC-sleeve for R422MWP (10 pcs) | 8951011405 |



1/2" Torsion

Model Part#
RS435B 8951012378

Torsion bars with both ends 1/2" square drive (male and female), total length 194 mm



| Model | data on bar (colour) | |
|--------|---|---------------------------------|
| RS435B | 100 Nm (black), 120 Nm (white), 150 Nm (orange) | 110 Nm (blue), 135 Nm (grey) |

1/2" Inbus

Model Part#
RS438A 8951012376

Special sockets with hexagonal (Allen, Inbus) male key ends - indispensable for many vehicle applications like truck doors, covers etc. - length 79 mm



| Model | shape and size |
|--------|-------------------------------------|
| RS438A | H6, H7, H8, H10, H12, H14, H17, H19 |

1/2" Torx

Model Part#
RS438T 8951012377

Special sockets with Star tip (TORX) male key ends - indispensable for many vehicle applications like truck doors, covers etc. - length 79 mm



| Model | shape and size |
|--------|-----------------------------------|
| RS438T | T25, T27, T30, T40, T45, T55, T60 |



RC4784

02| Assembly

| Screwdrivers

- Straight screwdrivers
- Pistol screwdrivers

01

02

03

04

05

06

07

08

09

10

11

12

13

14

15

16


17

18

19

20

SCREWDRIVER



Model Part#
RC4784 8951073023

| Model | | RC4784 |
|------------------|--|------------------------|
| Min Torque | | 1 Nm |
| Max Torque | | 6 Nm |
| Bit Drive | | 1/4" Fem.Hex QC |
| Adjustment | | External |
| Speed | | 1770 rpm |
| Weight | | 0,92 kg |
| Hose | | 8 mm |
| Dimensions axbxc | | 165x160x45 mm |
| Air cons. ave. | | 440 l/min |
| Air cons. | | 595 l/min |
| Air inlet | | 1/4" IG |
| Clutch Type | | Roller* |
| Sound LpA | | 80.3 dB(A) |
| Vibration | | < 2,5 m/s ² |

6 Nm external adjustment



- Lightweight thanks to composite material
- Ergonomic rubber handle
- Precise adjustable speed up to 1770 rpm
- Also for use with balancer
- The tool offers 3 possible connections to compressed air supply
- To use upper or side air inlet pls. use model AR1 or regulateable swivel joint DG1R for regulating incoming air
- Quick coupler for screw driver bits
- Forward / reverse switch

- *R: shut-off by slip clutch
- D: motorstart per push button and proof

Model Part#
RC4760 8951073012

| Model | | RC4760 |
|------------------|--|------------------------|
| Min Torque | | 1 Nm |
| Max Torque | | 7 Nm |
| Bit Drive | | 1/4" Fem.Hex QC |
| Adjustment | | Internal |
| Speed | | 2000 rpm |
| Weight | | 1,10 kg |
| Hose | | 8 mm |
| Dimensions axbxc | | 242x42 mm |
| Air cons. ave. | | 350 l/min |
| Air cons. | | 470 l/min |
| Air inlet | | 1/4" IG |
| Clutch Type | | Roller |
| Sound LpA | | 88.7 dB(A) |
| Vibration | | < 2,5 m/s ² |

7 Nm inner adjustment



- Large straight tool, for fast assembly
- Easy to reach forward/reverse shift which can be locked in reverse for longer disassemblies
- Quick coupler for screw driver bits
- Forward / reverse switch


Model Part#
RC4700 8951073002

| Model | | RC4700 |
|------------------|--|------------------------|
| Min Torque | | 1 Nm |
| Max Torque | | 7 Nm |
| Bit Drive | | 1/4" Fem.Hex QC |
| Adjustment | | Internal |
| Speed | | 2100 rpm |
| Weight | | 1,15 kg |
| Hose | | 8 mm |
| Dimensions axbxc | | 210x150x42 mm |
| Air cons. ave. | | 430 l/min |
| Air cons. | | 585 l/min |
| Air inlet | | 1/4" IG |
| Clutch Type | | Roller |
| Sound LpA | | 88.6 dB(A) |
| Vibration | | < 2,5 m/s ² |

7 Nm inner adjustment



- Popular short screwdriver
- High speed
- Quick coupler for screw driver bits
- Forward / reverse switch



The right tool for your needs !

Simple setting of the shut-off torque from outside on front ring

Hanger for balancer



Composite housing with insulating rubber handle

Practical thumb switch for forward / reverse

Silenced / down handle exhaust

RC4784

- 01
- 02
- 03
- 04
- 05
- 06
- 07
- 08
- 09
- 10
- 11
- 12
- 13
- 14
- 15
- 16
- 17
- 18
- 19
- 20



RC4607

03| Drilling

| Drills

- 6,5 mm drills
- 10 mm drills
- 13 mm drills

| Accessories

- Key chucks
- Keyless chucks

01

02

03

04

05

06

07

08

09

10

11

12

13

14

15

16


17

18

19

20

DRILLS 6,5 & 10 MM



Model Part#
RC4105 8951073001

Model Part#
RC4100 8951073000

Model Part#
RC4107 8951073011

| Model | RC4105 |
|---------------------------------|-----------------------|
| Drill diam. | 6.5 mm |
| Power | 180 W |
| Speed | 3000 rpm |
| Weight | 0.58 kg |
| Hose | 8 mm |
| Dimensions axbxc | 165x160x38 mm |
| Air cons. ave. | 330 l/min |
| Air cons. | 440 l/min |
| Air inlet | 1/4" IG |
| Sound LpA | 71.3 dB(A) |
| Vibration | 3.24 m/s ² |
| Reverse switch Composite | |

| Model | RC4100 |
|---------------------|-----------------------|
| Drill diam. | 10 mm |
| Power | 500 W |
| Speed | 2200 rpm |
| Weight | 0.95 kg |
| Hose | 8 mm |
| Dimensions axbxc | 193x132x42 mm |
| Air cons. ave. | 350 l/min |
| Air cons. | 470 l/min |
| Air inlet | 1/4" IG |
| Sound LpA | 86.7 dB(A) |
| Vibration | 3.19 m/s ² |
| Only forward | |

| Model | RC4107 |
|---------------------------------|-----------------------|
| Drill diam. | 10 mm |
| Power | 380 W |
| Speed | 2200 rpm |
| Weight | 0.93 kg |
| Hose | 8 mm |
| Dimensions axbxc | 220x100x50 mm |
| Air cons. ave. | 480 l/min |
| Air cons. | 650 l/min |
| Air inlet | 1/4" IG |
| Sound LpA | 81.3 dB(A) |
| Vibration | 3.06 m/s ² |
| Reverse switch Composite | |



- Ergonomic and lightweight drill with 6,5 mm key-chuck
- Insulating composite handle with rubber grip
- Precise to regulate the speed
- Well suited for use with balancers/hose balancers due to its 3 connecting possibilities for compressed air supply



- Handy drill with short design
- Including a RÖHM® - quick chuck up to 10 mm (3/8")




- Ergonomic and lightweight tool with anti-slip rubber patches
- Precise adjustable speed for cautious start-ups
- Silenced
- Well suited for use with balancers/hose balancers due to its 3 connecting possibilities for compressed air supply.
- Equipped with high quality key-less chuck from "RÖHM®"

Balancers

Model Part#
RC9311 8951011260



- Capacity 0,4 to 1 kg
- Stroke 1600 mm



Model Part#
RC4500 8951073021

Model Part#
RC4607 8951073090

| Model | | RC4500 |
|------------------|--|-----------------------|
| Drill diam. | | 10 mm |
| Power | | 500 W |
| Speed | | 2000 rpm |
| Weight | | 1.15 kg |
| Hose | | 8 mm |
| Dimensions axbxc | | 192x152x42 mm |
| Air cons. ave. | | 460 l/min |
| Air cons. | | 620 l/min |
| Air inlet | | 1/4" IG |
| Sound LpA | | 92.7 dB(A) |
| Vibration | | 3.16 m/s ² |

Reverse switch



- Compact tool with forward/reverse switch on handle
- Equipped with RÖHM®-quick chuck up to 10 mm (3/8").

| Model | | RC4607 |
|------------------|--|-----------------------|
| Drill diam. | | 10 mm |
| Power | | 500 W |
| Speed | | 2000 rpm |
| Weight | | 1.00 kg |
| Hose | | 8 mm |
| Dimensions axbxc | | 225x40x42 mm |
| Air cons. ave. | | 380 l/min |
| Air cons. | | 510 l/min |
| Air inlet | | 1/4" IG |
| Sound LpA | | 81.3 dB(A) |
| Vibration | | 3.37 m/s ² |

Composite



- High quality drill with double front bearing
- 3-planet-gear
- Down-handle exhaust with muffler
- Equipped with 10 mm (3/8") quality RÖHM®- quick key-less chuck
- Cold-insulating composite handle




- 01
- 02
- 03
- 04
- 05
- 06
- 07
- 08
- 09
- 10
- 11
- 12
- 13
- 14
- 15
- 16
- 17
- 18
- 19
- 20

Balancers

Model Part#
RC9312 8951011261



- Capacity 1 to 2kg
- Stroke 1600 mm



Model Part#
RC4650 8951073050

Model Part#
RC4550 8951073031

| | | |
|-----------------------|--|-----------------------|
| Model | | RC4650 |
| Drill diam. | | 10 mm |
| Power | | 500 W |
| Speed | | 1500 rpm |
| Weight | | 1.10 kg |
| Hose | | 8 mm |
| Dimensions axbxc | | 210x42x84 mm |
| Air cons. ave. | | 330 l/min |
| Air cons. | | 450 l/min |
| Air inlet | | 1/4" IG |
| Sound LpA | | 89.9 dB(A) |
| Vibration | | 3.14 m/s ² |
| Reverse switch | | |

| | | |
|-----------------------|--|-----------------------|
| Model | | RC4550 |
| Drill diam. | | 13 mm |
| Power | | 500 W |
| Speed | | 800 rpm |
| Weight | | 1.40 kg |
| Hose | | 8 mm |
| Dimensions axbxc | | 220x150x42 mm |
| Air cons. ave. | | 430 l/min |
| Air cons. | | 585 l/min |
| Air inlet | | 1/4" IG |
| Sound LpA | | 91.9 dB(A) |
| Vibration | | 4.51 m/s ² |
| Reverse switch | | |



- Slim tool with 84 mm height
- With RÖHM® - key chuck up to 10 mm (3/8")

- Reversible 13 mm (1/2") drill
- Double 3-planet-gear
- Double front bearing for tough applications
- With precise RÖHM® - quick key-less chuck
- Detachable side handle

Powerful & precise



10 mm RÖHM® key less chuck

Adjustable power

Down handle exhaust with possibility of connecting exhaust-silencing hose

Composite housing with isolating rubber grip

Safety lever

Drill chuck with precision

Fast key & key-less chuck from "RÖHM®"

Key chuck (with key 6,5-13 mm)
 up to 6,5 mm 8951011473
 up to 10 mm 8951011451
 up to 13 mm 8951011452
 key 8951011453

Key-less chuck
 up to 10 mm 8951011458
 up to 13 mm 8951011459



Balancers

In order to design an ergonomic and efficient work station, the straight drills often need to be equipped with balancers as well as straight-ended spiral hoses or hose balancers. (See page 101).



RC4607

01
02
03
04
05
06
07
08
09
10
11
12
13
14
15
16
17
18
19
20



RC5195

04| Chipping

| Chisel hammers

- 11 mm hex hammers
- 12 mm hex hammers
- 14,7 mm hex hammers

| Accessories

- Chisels
- Retainer
- Quick chuck

01

02

03

04

05

06

07

08

09

10

11

12

13

14

15

16


17

18

19

20

CHISEL HAMMER CHISEL HAMMER SETS

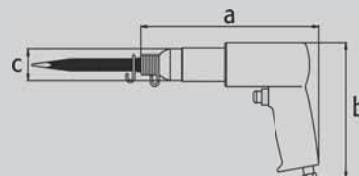


Model Part#
RC5100 8951071022

Model Part#
RC5120 8951171013

Model Part#
RC5160 8951171033

| | | |
|-------------------|--------|------------------------|
| Model | RC5100 | |
| Chisel insert | | 11 mm/0.433 in. |
| Piston Stroke / ø | | 60/19 mm |
| Blows | | 3000 min ⁻¹ |
| Weight | | 1.5 kg |
| Hose | | 8 mm |
| Dimensions axbxc | | 200x160x39 mm |
| Air cons. ave. | | 270 l/min |
| Air cons. | | 400 l/min |
| Air inlet | | 1/4" IG |
| Blow energy | | 6 Joule |
| Sound LpA | | 94.8 dB(A) |
| Vibration | | 13.2 m/s ² |

6 joule



- Compact chisel hammer with 11 mm hex shank
- Adjustable blow power
- Including retainer spring RC70

Set for car body / metal

Air hammer set hexagonal 11 mm for metal and sheet metal applications in tool box with:

| | |
|-------------------------------------|--------|
| Air hammer model | RC5100 |
| Spring retainer model | RC70 |
| Deriveting chisel model | RC22S |
| Welding spot splitting chisel model | RC19S |
| Double blade cutting chisel model | RC60S |
| Flat chisel model | RC20S |
| Curve splitting chisel model | RC18S |



Model Part#
RC5150 8951171023

Set for stone / concrete

Air hammer set hexagonal 11 mm for stone and concrete applications in tool box with:

| | |
|------------------------------------|--------|
| Air hammer model | RC5100 |
| Solid retainer model | RC76-1 |
| Pointed chisel 240 mm length model | SS10 |
| Flat chisel 240 x 20 mm model | SS20 |
| Flat chisel 240 x 30 mm model | SS30 |
| Flat chisel 240 x 40 mm model | SS40 |
| Groove chisel 240 mm model | SS50 |













Set for brake pads / riveting

Air hammer set hexagonal 11 mm for truck brake pad riveting and removal for hollow aluminium or copper rivets in tool box with:


| | |
|--|---------|
| Air hammer model | RC5100 |
| Spring retainer model | RC70 |
| Rivet head 8 mm (6 / 10 mm*) model (*optional sizes) | RC40S-8 |
| Deriveter chisel 8 mm (10 mm*) model | RC41S-8 |
| Counter holder (anvil) model | RC42S-8 |



Model Part#
RC5185 8951000152







| | |
|-------------------|--|
| Model | RC5185 |
| Chisel insert |  11 mm/0.433 in. |
| Piston Stroke / ø | 70/19 mm |
| Blows |  3000 min ⁻¹ |
| Weight |  1.7 kg |
| Hose |  8 mm |
| Dimensions axbxc |  179x163x57 mm |
| Air cons. ave. |  250 l/min |
| Air cons. |  372 l/min |
| Air inlet |  1/4" IG |
| Blow energy | 9 Joule |
| Sound LpA |  102 dB(A) |
| Vibration |  8.2 m/s ² |

9 joule




- Quick change retainer for fast chisel changes (provided with the tool)
- High resistance throttle & bushing valves
- Teasing trigger
- Aluminum housing
- Back part designed for great handling
- Curved handle with TPR injection on the back part
- Rear exhaust

Model Part#
RC5195 8951000154

| | |
|-------------------|--|
| Model | RC5195 |
| Piston Stroke / ø |  95/19 mm |
| Blows |  2100 min ⁻¹ |
| Weight |  2 kg |
| Hose |  8 mm |
| Dimensions axbxc |  223x163x57 mm |
| Blow energy | 12 Joule |
| Vibration |  11.9 m/s ² |

12 joule



Model Part#
RC5185K-M 8951000153
RC5195K-M 8951000155

Set for metal

Set with hexagon chisels (11 mm):

- 1 chisel hammer RC5185 or RC5195 with steel retainer
- 1 Universal chisel - 135 x 19 mm RC73
- 1 De-riveting - 140 x 20 mm RC20S
- 1 Spot weld chisel - 140 x 29 mm RC22S
- 1 Curve cutting chisel 1mm thick - 140 mm RC19S
- 1 tool box RC18S

Model Part#
RC5185K-C 8951000208
RC5195K-C 8951000209

Set for stone / concrete

Set with hexagon chisels (11 mm):

- 1 chisel hammer RC5185 or RC5195 with steel retainer
- 1 Pointed chisel - 135 mm RC73
- 1 Flat chisel - 140 x 20 mm SS10K
- 1 Flat chisel - 140 x 30 mm SS20K
- 1 Flat chisel - 135 x 40 mm SS30K
- 1 tool box SS40K

Low Vibration & Powerful

Easy to operate:
 Quick change retainer for fast chisel changes (provided with the tool)

High Effectiveness:
 Back part designed for great handling



High resistance throttle & bushing valves teasing trigger












Comfort & Insulation:
 Curved handle with TPR injection on the back part




RC5185

01
02
03
04
05
06
07
08
09
10
11
12
13
14
15
16
17
18
19
20

Model Part#
RC5176 8951171043












| Model | RC5176 | |
|-----------------------------|--|------------------------|
| Chisel insert |  | 11 mm/0.433 in. |
| Piston Stroke / \emptyset | | 94/19 mm |
| Blows |  | 2100 min ⁻¹ |
| Weight |  | 2.05 kg |
| Hose |  | 8 mm |
| Dimensions axbxc |  | 245x162x39 mm |
| Air cons. ave. |  | 260 l/min |
| Air cons. |  | 380 l/min |
| Air inlet |  | 1/4" IG |
| Blow energy |  | 9 Joule |
| Sound LpA |  | 97.3 dB(A) |
| Vibration |  | 4.5 m/s ² |

Set for stone / concrete




- Hammer with extra long stroke
- Adjustable impacting power, easy to control
- For hexagonal chisels 11 mm
- Including hammer spring RC70

Model Part#
RC5305 8951071065

| Model | RC5305 | |
|-----------------------------|--|------------------------|
| Chisel insert |  | 12 mm/0.472 in. |
| Piston Stroke / \emptyset | | 50/20 mm |
| Blows |  | 3000 min ⁻¹ |
| Weight |  | 2.55 kg |
| Hose |  | 8 mm |
| Dimensions axbxc |  | 294x150x44 mm |
| Air cons. ave. |  | 260 l/min |
| Air cons. |  | 380 l/min |
| Air inlet |  | 1/4" IG |
| Blow energy |  | 6 Joule |
| Sound LpA |  | 98.8 dB(A) |
| Vibration |  | 5.5 m/s ² |












12 mm hexagonal
















- Small straight hammer for metal or stone for chisels with 12 mm hex shank
- With steel retainer RC76-3

Model Part#
RC5310 8951171053

Model Part#
RC5400 8951071076

| | | |
|-------------------|--|------------------------|
| Model | RC5310 | |
| Chisel insert |  | 12 mm/0.472 in. |
| Piston Stroke / ø | 50/20 mm | |
| Blows |  | 3000 min ⁻¹ |
| Weight |  | 2.55 kg |
| Hose |  | 8 mm |
| Dimensions axbxc |  | 294x150x44 mm |
| Air cons. ave. |  | 260 l/min |
| Air cons. |  | 380 l/min |
| Air inlet |  | 1/4" IG |
| Blow energy |  | 6 Joule |
| Sound LpA |  | 98.8 dB(A) |
| Vibration |  | 7.9 m/s ² |
| 6 joule | | |

| | | |
|-------------------|--|------------------------|
| Model | RC5400 | |
| Chisel insert |  | 14.7 mm/0.579 in. |
| Piston Stroke / ø | 76/29 mm | |
| Blows |  | 1700 min ⁻¹ |
| Weight |  | 7.5 kg |
| Hose |  | 13 mm |
| Dimensions axbxc |  | 420x175x57 mm |
| Air cons. ave. |  | 480 l/min |
| Air cons. |  | 720 l/min |
| Air inlet |  | 3/8" IG |
| Blow energy |  | 22 Joule |
| Sound LpA |  | 99 dB(A) |
| Vibration |  | 13.8 m/s ² |
| 22 joule | | |



- Air hammer set hexagonal 12 mm for stone and concrete applications in tool box with:
- Air hammer model RC5305
- Steel retainer model RC76-3
- Pointed chisel 210 mm length model RC51S
- Flat chisel 210 x 20 mm model RC52S
- Flat chisel 210 x 30 mm model RC53S
- Flat chisel 210 x 40 mm model RC54S

- Large hammer for chisel insert size 14,7 mm hexagonal for heavy duty applications
- Equipped with steel retainer



For Model 5100-5195

for metal applications**Splitting chisel**

135 mm



Model Part#
RC14S 8951011923

Self-guided cutting chisel

127 mm



Model Part#
RC16S 8951011924

Curve cutting chisel for metal 1mm thick

140 mm



Model Part#
RC18S 8951011925

Spot weld chisel

29x140 mm



Model Part#
RC19S 8951011926

Universal chisel

19x135 mm



Model Part#
RC20S 8951011927

Deriveting chisel


20x140 mm



Model Part#
RC22S 8951011928

Double cutting chisel for metal

140 mm



Model Part#
RC60S 8951011930

for concrete and stone applications**Flat chisel 20 mm**

210 mm



Model Part#
SS20 8951011934

140 mm



Model Part#
SS20K 8951011935


Flat chisel 30 mm

205 mm



Model Part#
SS30 8951011936


140 mm



Model Part#
SS30K 8951011937

Flat chisel 40 mm

210 mm



Model Part#
SS40 8951011938

135 mm



Model Part#
SS40K 8951011939

Kit 8951011931

Kit RC618 8951011931
Includes: RC18S, RC19S, RC20S, RC60S,
RC22S



For Model
5100-5195



For Model
5305

Raw chisel

12x123 mm



Model Part#
RC30S 8951011929

Pointed chisel

210 mm



Model Part#
SS10 8951011932

135 mm



Model Part#
SS10K 8951011933

Riveting chisel



| | | |
|-----------------|------|--------------|
| Model | | Part# |
| RC40S-6 | 6 mm | 8951011942 |
| RC40S-8 | 8 mm | 8951011943 |
| RC40S-10 | 10mm | 8951011941 |

Deriveting chisel



| | | |
|-----------------|------|--------------|
| Model | | Part# |
| RC41S-8 | 6 mm | 8951011945 |
| RC41S-10 | 8 mm | 8951011944 |


Riveting block for vice



Model Part#
RC42S-6 6 mm 8951011947

Pointed chisel

160 mm



Model Part#
RC51S 8951011949

Flat chisel 20 mm

200 mm



Model Part#
RC52S 8951011950

Flat chisel 30 mm

200 mm



Model Part#
RC53S 8951011951

Flat chisel 40 mm

200 mm



Model Part#
RC54S 8951011952



For Model
5400

Flat chisel 30 mm

30x190 mm



Model Part#
RC92 8951011953

Pointed chisel

185 mm



Model Part#
RC93S 8951011954

Retainer spring



Model Part# For
RC70 8951011958 5100-5195

Retainer aluminium



Model Part# For
RC76 8951011961 5100-5195

Retainer steel



Model Part# For
RC76-1 8951011962 5100
RC76-3 8951011964 5305
RC94 8951011955 5400

Quick chuck



Model Part# For
RC73 8951011960 5100-5195

Spring for steel cap



Model Part# For
RC79 8951011963 5305
RC95 8951011956 5400

Needle scaler attachment



Model Part# for
RC5605 8951076000 5100-5195

Needle set



Model Part#
RC5605 Needle set 3mm 8940159860

- 01
- 02
- 03
- 04
- 05
- 06
- 07
- 08
- 09
- 10
- 11
- 12
- 13
- 14
- 15
- 16
- 17
- 18
- 19
- 20



RC5620

05| Descaling

- | Needle Scalers
 - Straight scalers
 - Pistol scalers

- | Accessories
 - Needles
 - Needle plates

01

02

03

04

05

06

07

08

09

10

11

12

13

14

15

16


17

18

19

20

NEEDLE SCALER



Model Part#
RC5610 8951076001

Model Part#
RC5615 8951076002

Model Part#
RC5620 8951076003

| | | |
|---|--|------------------------|
| Model | | RC5610 |
| Needle capacity | | 19 x 3 mm |
| Blows | | 4000 min ⁻¹ |
| Weight | | 2.55 kg |
| Hose | | 8 mm |
| Dimensions axbxc | | 468x44 mm |
| Air cons. ave. | | 190 l/min |
| Air cons. | | 280 l/min |
| Air inlet | | 1/4" IG |
| Sound LpA | | 89.5 dB(A) |
| Vibration | | 16.8 m/s ² |
| Needle set 19 x 3 mm + scraper 20 mm | | |

| | | |
|-----------------------------|--|------------------------|
| Model | | RC5615 |
| Needle capacity | | 12 x 3 mm |
| Blows | | 4000 min ⁻¹ |
| Weight | | 1.3 kg |
| Hose | | 8 mm |
| Dimensions axbxc | | 290x35 mm |
| Air cons. ave. | | 120 l/min |
| Air cons. | | 180 l/min |
| Air inlet | | 1/4" IG |
| Sound LpA | | 88.1 dB(A) |
| Vibration | | 11.4 m/s ² |
| Needle set 12 x 3 mm | | |

| | | |
|--|--|------------------------|
| Model | | RC5620 |
| Needle capacity | | 28 x 3 mm / 14 x 4 mm |
| Blows | | 4500 min ⁻¹ |
| Weight | | 3.6 kg |
| Hose | | 13 mm |
| Dimensions axbxc | | 345x180x61 mm |
| Air cons. ave. | | 200 l/min |
| Air cons. | | 300 l/min |
| Air inlet | | 3/8" IG |
| Sound LpA | | 97.6 dB(A) |
| Vibration | | 13.7 m/s ² |
| Needle set 19 x 3 and 14 x 4 mm | | |



- Combination tool for two cleaning processes
- Scraping off layers and surfaces with scraper
- Derusting around details with needles
- Incl. scraper and 19x3 mm needles

- Small, straight needle scaler for wheel rims, frames and work in limited space
- Incl. 12 x 3 mm needles

- Powerful needle scaler for rough removals
- Incl. 14 x 4 mm needles and for large surfaces 28 x 3 mm needles

Accessories for RC5610

| | | |
|-----------------|------------|--|
| Needle set | Part# | |
| 19 pcs. @ 3 mm | 8940159860 | |
| (Length 180 mm) | | |
| Needle plate | Part# | |
| 19 holes @ 3 mm | 8951011510 | |
| Scaler | Part# | |
| 20 mm | 8951011497 | |


Accessories for RC5615

| | | |
|-----------------|------------|--|
| Needle set | Part# | |
| 12 pcs. @ 3 mm | 8951011498 | |
| (Length 120 mm) | | |
| Needle plate | Part# | |
| 12 holes @ 3 mm | 8951011511 | |

Accessories for RC5620

| | | |
|-----------------|------------|--|
| Needle set | Part# | |
| 14 pcs. @ 4 mm | 8951011501 | |
| 28 pcs. @ 3 mm | 8951011500 | |
| (Length 180 mm) | | |
| Needle plate | Part# | |
| 14 holes @ 4 mm | 8951011503 | |
| 28 holes @ 3 mm | 8951011502 | |

NEEDLE SCALER

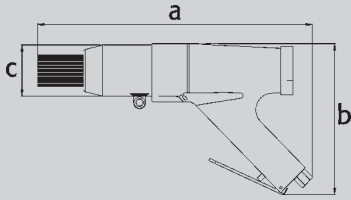

Model **Part#**
RC5625 **8951076004**

| | | |
|------------------|--|------------------------|
| Model | | RC5625 |
| Needle capacity | | 29 x 2 mm / 19 x 3 mm |
| Blows | | 3000 min ⁻¹ |
| Weight | | 2.7 kg |
| Hose | | 8 mm |
| Dimensions axbxc | | 320x175x47 mm |
| Air cons. ave. | | 120 l/min |
| Air cons. | | 170 l/min |
| Air inlet | | 1/4" IG |
| Sound LpA | | 94 dB(A) |
| Vibration | | 17.7 m/s ² |

Needle set 29 x 2 mm and 19 x 3 mm



- To work with small details use 29 x 2 needles
- For rough work 19 x 3 mm needles insulated handle and front exhaust

Accessories for RC5625

Needle set **Part#**
 19 pcs. @ 3 mm 8940159860

29 pcs. @ 2 mm 8951011504
 (Length 180 mm)

Needle plate **Part#**
 19 holes @ 3 mm 8951011513

29 holes @ 2 mm 8951011512

- 01
- 02
- 03
- 04
- 05**
- 06
- 07
- 08
- 09
- 10
- 11
- 12
- 13
- 14
- 15
- 16
- 17
- 18
- 19
- 20



RC6067

06| Speciality tools

| Cutting tools

- Loppers
- Shears
- Nibbler
- Punching / welting tool
- Files
- Spot weld drills
- Saws

| Accessories

- Saw blades
- Files

01

02

03

04

05

06

07

08

09

10

11

12

13

14

15


16

17

18

19

20



Model Part#
RC6220 8951076010

| | | |
|------------------|--|-----------------------|
| Model | | RC6220 |
| Weight | | 0.65 kg |
| Hose | | 8 mm |
| Dimensions axbxc | | 258x116x120 mm |
| Air cons. | | 0.5 l/min |
| Air inlet | | 1/4" IG |
| Sound LpA | | 65.2 dB(A) |
| Vibration | | 2.97 m/s ² |

For wood, twigs & plastic



- Pruning shear for max. diameter 15 mm
- Cuts wood, plastics and other soft materials, profiles, rods
- Safety latch against accidental cutting
- Knuckle protector

Model Part#
RC6210 8951076009

| | | |
|------------------|--|-----------------------|
| Model | | RC6210 |
| Cutting speed. | | 2 m/min |
| Cutting capacity | | 1.5 mm |
| Cutting width | | 5 mm |
| Weight | | 1.2 kg |
| Hose | | 8 mm |
| Dimensions axbxc | | 265x64x55 mm |
| Air cons. | | 360 l/min |
| Air cons. | | 540 l/min |
| Air inlet | | 1/4" IG |
| Sound LpA | | 87.2 dB(A) |
| Vibration | | 4.81 m/s ² |

Shear 5 mm



- Cuts in the middle keeping the material on both sides almost untouched
- Raw material and cut off part both remain in good shape
- Cutting width 5 mm at 2 m/min
- For thicknesses up to 1,5 mm (normal car body sheet metal and aluminium)
- Cutting curves possible over 100 mm radius




Model Part#
RC6212 8951076020

| | | |
|------------------|--|-----------------------|
| Model | | RC6212 |
| Cutting speed. | | 2 m/min |
| Cutting capacity | | 1.5 mm |
| Cutting width | | 5 mm |
| Weight | | 1.2 kg |
| Hose | | 8 mm |
| Dimensions axbxc | | 265x40x60 mm |
| Air cons. | | 360 l/min |
| Air cons. | | 540 l/min |
| Air inlet | | 1/4" IG |
| Sound LpA | | 87.2 dB(A) |
| Vibration | | 4.81 m/s ² |

Composite shear 5 mm hear 5 mm



- Cuts in the middle keeping the material on both sides in good shape
- Cutting width 5 mm at 2 m/min
- For thicknesses up to 1,5 mm (normal car body sheet metal and aluminium)
- Cutting curves possible over 100 mm radius
- Cold-insulating composite handle with integrated
- Rubber patches for better grip

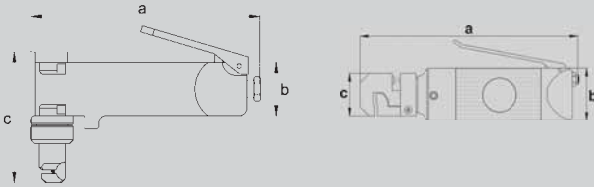

Model Part#
RC6100 8951076008

Model Part#
RC6301 8951076011

Model Part#
RC6453 8951076013

| | |
|------------------|-----------------------|
| Model | RC6100 |
| Cutting speed. | 2.6 m/min |
| Cutting capacity | 1 mm |
| Cutting width | 4 mm |
| Weight | 0.95 kg |
| Hose | 8 mm |
| Dimensions axbxc | 262x38 mm |
| Air cons. | 360 l/min |
| Air cons. | 540 l/min |
| Air inlet | 1/4" IG |
| Sound LpA | 91.6 dB(A) |
| Vibration | 8.55 m/s ² |

For sheet metal



- Sheet metal nibbler for shaping normal car body
- Material as well as aluminium sheet metal up to 1 mm thickness
- For cutting of small curves or for enlarging holes
- Cutting width 4 mm and cutting speed 2,6 m/min.
- Easy to maintain piston
 - regreasing through lid on top
- Punch and die plate are exchangeable



| | |
|------------------|-----------------------|
| Model | RC6301 |
| Tool | 22x12x1,2 / ø 5x1,2 |
| Weight | 1 kg |
| Hose | 8 mm |
| Dimensions axbxc | 245x54 mm |
| Air cons. | 0.8 l/min |
| Air inlet | 1/4" IG |
| Sound LpA | 70.6 dB(A) |
| Vibration | 3.97 m/s ² |

2 in 1: punching & welting



- Much less tiring to work with than manual tools
- For preparation of up to 1.2 mm sheet metal
- Parts for car body or aluminium before welding
- Punch diameter 5 mm for spot welding
- Equipped with air-hydraulic multiplier system

| | |
|------------------|--------------------------|
| Model | RC6453 |
| Tool | ø 8 |
| Stroke/min | 2000 min ⁻¹ |
| Weight | 1,15 without counter arm |
| Hose | 8 mm |
| Dimensions axbxc | 285x215x75 mm |
| Air cons. | 110 l/min |
| Air cons. | 240 l/min |
| Air inlet | 1/4" IG |
| Sound LpA | 88.8 dB(A) |
| Vibration | < 2,5 m/s ² |

8 mm fraiser bit swiveling conterman





- Fraiser for precise removal of spot welding points for example: car body parts
- Fraising bit is pushed automatically onto the sheet metal by compressed air and the tool begins to run, removing only the point from one layer of the bonding. The lower layer of sheet metal is not drilled
- Adjustable fraising depth by 50 micron steps
- Includes a 75 mm deep counter arm (swivels and can be removed)
- Only usable with fraising bits length 47mm

Accessories for RC6453

Fraising Bits

For the precise removal of welding spots without drilling through the "good" side of the sheet metal. Made of very hard cobalt steel HSCo

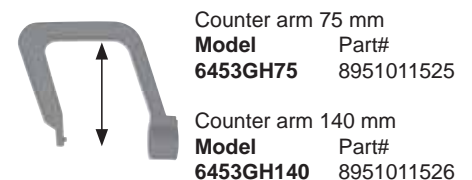

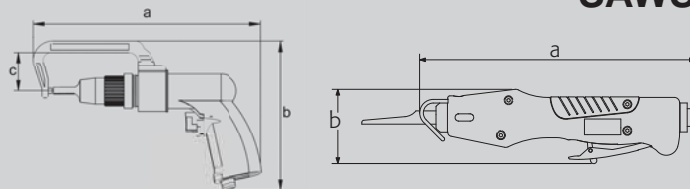

Model Part#
RC6900 8951075000

Model Part#
RC6050 8951079001

Model Part#
RC6067 8951079011

| | | |
|---------------------|--|------------------------|
| Model | | RC6900 |
| Drive \varnothing | | 6.5 mm |
| Strokes | | 3700 min ⁻¹ |
| Weight | | 1.1 kg |
| Hose | | 8 mm |
| Dimensions axbxc | | 165x48x28 mm |
| Air cons. | | 120 l/min |
| Air cons. | | 170 l/min |
| Air inlet | | 1/4" IG |
| Sound LpA | | 84.5 dB(A) |
| Vibration | | 8.61 m/s ² |

Small file



- For deburring or shaping sheet metal, iron, plastics, deburring
- Double piston drive
- Including file set with 4 different files (flat, half round, round, triangular)

| | | |
|------------------|--|------------------------|
| Model | | RC6050 |
| Stroke | | 10 mm |
| Stroke/min | | 9500 min ⁻¹ |
| Weight | | 0.65 kg |
| Hose | | 8 mm |
| Dimensions axbxc | | 262x38 mm |
| Air cons. | | 220 l/min |
| Air cons. | | 330 l/min |
| Air inlet | | 1/4" IG |
| Sound LpA | | 79.9 dB(A) |
| Vibration | | 12.57 m/s ² |

Easy exchange of blades - rear exhaust



- Fast and handy air saw for sheet metals
- Insulated handle
- Exhaust guided to the rear side
- Ideally suited for precise cutting of car body parts, profiles and sun roofs
- 10 mm stroke

Model Part#
RC6051 8951179000

Saw Set in tool box including:
1 saw model RC6050
5 saw blades fine (32 teeth per inch)
5 saw blades medium (24 teeth per inch)
1 mini lubricator model G1K and 1 universal air joint model DG1 and keys



| | | |
|------------------|--|-------------------------|
| Model | | RC6067 |
| Stroke | | 10 mm |
| Stroke/min | | 10000 min ⁻¹ |
| Weight | | 0.51 kg |
| Hose | | 8 mm |
| Dimensions axbxc | | 262x38 mm |
| Air cons. | | 150 l/min |
| Air cons. | | 225 l/min |
| Air inlet | | 1/4" IG |
| Sound LpA | | 79.9 dB(A) |
| Vibration | | 6.32 m/s ² |

Low vibration & composite - rear exhaust



- Powerful air saw with composite handle
- Rear exhaust
- Suitable to cut through profiles and multiple layer sheet metals
- Using long saw blades larger tubes and profiles can even be cut in one
- 10000 strokes/min.
- Using a file adapter the tool can also be converted into an air file (extra accessory)

Accessories for RC6900

See page 51



Saw blades - standard length



| | |
|--------------------------------|--|
| For model | Part# 8951011514 |
| RC6050 RC6067 | Teeth / inch: 32 Distance of teeth: 0,8 mm Material: Bi-Metal A: 4,2 mm |

Useable for:
steel, sheet metal, car body

| | |
|--------------------------------|--|
| For Model | Part# 8951011515 |
| RC6050 RC6067 | Teeth / inch: 24 Distance of teeth: 1,0 mm Material: Bi-Metal A: 4,2 mm |

Useable for:
casted iron, aluminium, copper, zinc,
composite, bumper


| | |
|--------------------------------|--|
| For model | Part# 8951011520 |
| RC6050 RC6067 | Teeth / inch: 18 Distance of teeth: 1,4 mm Material: Bi-Metal A: 4,2 mm |

Useable for:
plastic, wood, bumper

| | |
|--------------------------------|--|
| For model | Part# 8951011519 |
| RC6050 RC6067 | Teeth / inch: 14 Distance of teeth: 1,8 mm Material: Bi-Metal A: 4,2 mm |

Useable for:
plastic and wood

Saw blades - extra long



| | |
|--------------------------------|--|
| For model | Part# 8951011521 |
| RC6050 RC6067 | Teeth / inch: 32 Distance of teeth: 0,8 mm Material: Bi-Metal A: 4,2 mm |

Useable for: steel, sheet metal, car body


| | |
|--------------------------------|--|
| For model | Part# 8951011522 |
| RC6050 RC6067 | Teeth / inch: 24 Distance of teeth: 1,0 mm Material: Bi-Metal A: 4,2 mm |

Useable for: casted iron, aluminium, copper,
zinc, composite, bumper

| | |
|--------------------------------|--|
| For model | Part# 8951011523 |
| RC6050 RC6067 | Teeth / inch: 18 Distance of teeth: 1,4 mm Material: Bi-Metal A: 4,2 mm |

Useable for:
plastic, wood, bumper

Saw blades - SIG Type



| | |
|---------------|--|
| For model | Part# 8951011523 |
| RC6067 | Teeth / inch: 18 Distance of teeth: 1,4 mm Material: Bi-Metal A: 4,2 mm |

Useable for: plastic, wood, bumper

| | |
|---------------|--|
| For model | Part# 8951011517 |
| RC6067 | Teeth / inch: 32 Distance of teeth: 0,8 mm Material: Bi-Metal A: 4,2 mm |

Useable for: steel, sheet metal

| | |
|---------------|--|
| For model | Part# 8951011516 |
| RC6067 | Teeth / inch: 24 Distance of teeth: 1,0 mm Material: Bi-Metal A: 4,2 mm |

Useable for:
casted iron, aluminium, copper, zinc, composite

| | |
|---------------|--|
| For model | Part# 8951011518 |
| RC6067 | Teeth / inch: 14 Distance of teeth: 1,8 mm Material: Bi-Metal A: 4,2 mm |

Useable for:
aluminium, copper, zinc, composite, wood

Accessories for files

File adapter



| | |
|---------------|---|
| For model | Part# 8951011531 |
| RC6067 | needed for using files with saw RC6067 |

Set of files



| | |
|---------------------------------|--|
| For model | Part# 8951011529 |
| RC6900 RC6067* | included files: flat, round half-rounded, triangular |

* only useable with adapter 8951011531

Individual files



| | |
|---------------------------------|---------------------|
| For model | Part# 8951011532 |
| RC6900 RC6067* | File flat 10 x 3 mm |

* only useable with adapter 8951011531



| | |
|---------------------------------|---|
| For model | Part# 8951011533 |
| RC6900 RC6067* | File round Length: 115 mm ø: 6 mm |

* only useable with adapter 8951011531



| | |
|---------------------------------|--|
| For model | Part# 8951011534 |
| RC6900 RC6067* | File half-rounded 10 x 3,8 mm Length: 115 mm ø: 6 mm |

* only useable with adapter 8951011531



| | |
|---------------------------------|---|
| For model | Part# 8951011535 |
| RC6900 RC6067* | File triangular 7 x 7 mm Length: 115 mm ø: 6 mm |

* only useable with adapter 8951011531



RC6718Xi

07| Riveting

| Riveters

- For aluminium & copper
- For steel
- For stainless steel

01

02

03

04

05

06

07

08

09

10

11

12

13

14

15

16


17

18

19

20

RIVETERS



Model Part#
RC6700 8951074001

| Model | | RC6700 |
|----------------------|----------|--------------------------|
| Blind rivet | | 2.4 - 5.0 mm |
| Mouthpiece Rivet pin | | 1.8 / 2.2 / 2.8 / 3.3 mm |
| Force | F | 12000 N |
| Weight | | 1.6 kg |
| Hose | | 8 mm |
| Dimensions axbxc | | 225x280x100 mm |
| Air cons. | | 1.2 l/min |
| Air inlet | | 1/4" IG |
| Sound LpA | | 86.5 dB(A) |
| Vibration | | 3.5 m/s ² |

Model Part#
RC6710 8951074002

| Model | | RC6710 |
|----------------------|----------|--------------------------------------|
| Blind rivet | | 2.4 - 6.4 mm |
| Mouthpiece Rivet pin | | 1.9 / 2.4 / 2.9 / 3.4 / 4.0 / 4.4 mm |
| Force | F | 19000 N |
| Weight | | 2.1 kg |
| Hose | | 8 mm |
| Dimensions axbxc | | 255x325x110 mm |
| Air cons. | | 1.8 l/min |
| Air inlet | | 1/4" IG |
| Sound LpA | | 64.1 dB(A) |
| Vibration | | 4.3 m/s ² |

Model Part#
RC6715 8951074003

| Model | | RC6715 |
|----------------------|----------|--------------------------|
| Blind rivet | | 3.2 - 6.4 mm |
| Mouthpiece Rivet pin | | 2.1 / 2.8 / 3.2 / 4.5 mm |
| Force | F | 15000 N |
| Weight | | 1.8 kg |
| Hose | | 8 mm |
| Dimensions axbxc | | 300x300x100 mm |
| Air cons. | | 1.1 l/min |
| Air inlet | | 1/4" IG |
| Sound LpA | | 77.3 dB(A) |
| Vibration | | 2.4 m/s ² |

Up to 5 mm standard (alu/copper)



- Handy blind riveter with collection container for torn-off rivet pins
- Durable air-hydraulic force multiplying system
- Hanger for use with balancers with 4 different sizes of mouthpieces
- Only useable for copper, aluminium or softer material

Up to 6,4 mm standard (alu/copper)



- Handy blind riveter with collection container for torn-off rivet pins
- Durable air-hydraulic force multiplying system
- Hanger for use with balancers
- With 6 different sizes of mouthpieces
- Only useable for copper, aluminium or softer material

Up to 6,4 mm standard (alu/copper)



- Robust riveter with big collection container for torn-off rivet pins
- Ergonomic rubber coated handle
- Hanger for use with balancers
- Durable air-hydraulic force multiplying system
- With 4 different sizes of mouthpieces
- Useable for copper, aluminium & steel
- Not suited for stainless steel

Balancer










Model Part#
RC9313 8951011262












- Capacity 2 to 3 kg
- Stroke 1600 mm

Model Part#
RC6718Xi 8951074008

Model Part#
RC6720 8951074004

| | | |
|-------------------------|---|------------------------------------|
| Model | | RC6718Xi |
| Blind rivet |  | 4.0 - 6.4 mm |
| Mouthpiece Rivet pin |  | 2.5 / 3.2 / 4.1 / 4.2 mm „BOLT“ |
| Force | F | 15200 N |
| Weight |  | 1.9 kg |
| Hose |  | 8 mm |
| Dimensions axbxc |  | 310x316x136 mm |
| Air cons. |  | 4.3 l/min |
| Air inlet |  | 1/4" IG |
| Sound LpA |  | 76.2 dB(A) |
| Vibration |  | 2.2 m/s ² |

| | | |
|-------------------------|---|---|
| Model | | RC6720 |
| Blind rivet |  | 4.8 - 6.4 mm (Inox) 4.8 - 8.0 mm (Steel) 6.4 mm "BULB" (Steel) 6.4 mm "BOLT" (Steel) |
| Mouthpiece Rivet pin |  | 3.2 / 4.3 / 5.1 mm 4.2 mm for „BOLT“ |
| Force | F | 12000 N |
| Weight |  | 2.6 kg |
| Hose |  | 8 mm |
| Dimensions axbxc |  | 225x280x100 mm |
| Air cons. |  | 2 l/min |
| Air inlet |  | 1/4" IG |
| Sound LpA |  | 66.2 dB(A) |
| Vibration |  | 3.5 m/s ² |

Suction up to 6,4 mm (steel)



- High quality riveter with rivet pin removal by suction (can be switched off)
- Transparent container
- Two-finger trigger for easier operation and ON/OFF-switch
- Cold insulated handle
- Hanger for use with balancers
- Useable for copper, aluminium & steel
- Not suited for stainless steel

For BULB & BOLT rivets



- High quality riveter with rivet pin removal by suction (can be switched off)
- Transparent container
- Hanger for use with balancers
- Useable for copper, aluminium, steel & stainless steel
- Also useable with high tension Bulb & Bolt rivets

01
02
03
04
05
06
07
08
09
10
11
12
13
14
15
16
17
18
19
20



RC7702V6

08| Grinding & sanding

| Grinder

- Die & angle die grinders
- Erasers
- Tyre buffer
- Pistol & angle grinders
- MBX-removal system

| Sanders

- Belt sanders
- Orbital sanders

| Accessories

- Collets
- Abrasives
- Eraser wheels
- MBX brushes
- Backing pads
- Cutting discs

01

02

03

04

05

06

07

08

09

10

11

12

13

14

15

16


17

18

19

20

DIE GRINDER < 400 W

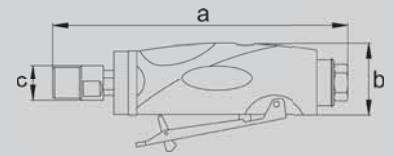

Model RC7051 Part# 8951000165

Model RC7009 Part# 8951000274

Model RC7058 Part# 8951000278

| | |
|----------------------------|------------------------|
| Model | RC7051 |
| Collet | 3 mm |
| Power | 40 W |
| Speed | 60000 rpm |
| Weight | 0.2 kg |
| Hose | 8 mm |
| Dimensions axbxc | 190x145x50 mm |
| Air cons. | 96 l/min |
| Air cons. | 192 l/min |
| Air inlet | 1/4" IG |
| Sound LpA | 71 dB(A) |
| Vibration | < 2,5 m/s ² |
| 40 Watt - 60000 rpm | |

| | |
|-----------------------------|-----------------------|
| Model | RC7009 |
| Collet | 6 mm |
| Power | 300 W |
| Speed | 30000 rpm |
| Weight | 0.37 kg |
| Hose | 8 mm |
| Dimensions axbxc | 190x145x50 mm |
| Air cons. | 144 l/min |
| Air cons. | 564 l/min |
| Air inlet | 1/4" IG |
| Sound LpA | 85.7 dB(A) |
| Vibration | 3.33 m/s ² |
| 300 Watt - 30000 rpm | |

| | |
|-----------------------------|-----------------------|
| Model | RC7058 |
| Collet | 6 mm |
| Power | 700 W |
| Speed | 23500 rpm |
| Weight | 0.82 kg |
| Hose | 8 mm |
| Dimensions axbxc | 190x145x50 mm |
| Air cons. | 288 l/min |
| Air cons. | 1146 l/min |
| Air inlet | 1/4" IG |
| Sound LpA | 92.7 dB(A) |
| Vibration | 1.82 m/s ² |
| 700 Watt - 23500 rpm | |



- 3 mm lightweight die grinder
- 60000 rpm with rear exhaust
- 1/8" collet included



- High speed motor (30 000 RPM)
- Metal housing with composite painting for great grip
- Rear exhaust
- Safety trigger



- 700W power
- Composite housing with ergonomic trigger for perfect handling
- Rear exhaust
- Long spindle for easy access to workspace

Engravers Tune up Kit

| | |
|--------|------------|
| Model | Part# |
| RC7051 | 8950280060 |



For bodyshop professionals




Spindel lock

400W with low speed and low vibration



Compatible with large range of accessories


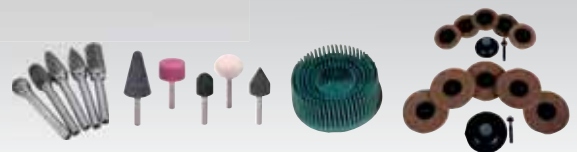











RC7128

- 01
- 02
- 03
- 04
- 05
- 06
- 07
- 08
- 09
- 10
- 11
- 12
- 13
- 14
- 15
- 16
- 17
- 18
- 19
- 20

Model
RC7028

Part#
8951000275

| Model | RC7028 | |
|-----------------------------|---|--|
| Collet |  6 mm | |
| Power |  400 W | |
| Speed |  27000 rpm | |
| Weight |  0.72 kg | |
| Hose |  8 mm | |
| Dimensions axbxc |  190x145x50 mm | |
| Air cons. |  228 l/min | |
| Air cons. |  900 l/min | |
| Air inlet |  1/4" IG | |
| Sound LpA |  85.2 dB(A) | |
| Vibration |  2.38 m/s ² | |
| 400 Watt - 27000 rpm | | |














- Perfect for burrs and mounted points
- Straight universal 400W die grinder
- One hand spindle lock
- High torque motor
- "Beast" design rubber handle



Model
RC7048

Part#
8951000276












| Model | RC7048 | |
|-----------------------------|---|--|
| Collet |  6 mm | |
| Power |  400 W | |
| Speed |  27000 rpm | |
| Weight |  0.8 kg | |
| Hose |  8 mm | |
| Dimensions axbxc |  190x145x50 mm | |
| Air cons. |  228 l/min | |
| Air cons. |  900 l/min | |
| Air inlet |  1/4" IG | |
| Sound LpA |  85.7 dB(A) | |
| Vibration |  3.78 m/s ² | |
| 400 Watt - 27000 rpm | | |



- For tight workspace
- Extended 400W die grinder
- One hand spindle lock
- High torque motor
- "Beast" design rubber handle

Model
RC7128

Part#
8951000277

| Model | RC7128 | |
|-----------------------------|---|--|
| Collet |  6 mm | |
| Power |  400 W | |
| Speed |  23000 rpm | |
| Weight |  0.76 kg | |
| Hose |  8 mm | |
| Dimensions axbxc |  190x145x50 mm | |
| Air cons. |  228 l/min | |
| Air cons. |  900 l/min | |
| Air inlet |  1/4" IG | |
| Sound LpA |  84.8 dB(A) | |
| Vibration |  4.05 m/s ² | |
| 400 Watt - 23000 rpm | | |



- Ideal for backing pads and cleaning applications
- 400W angle die grinder
- One hand spindle lock
- High torque motor
- "Beast" design rubber handle



- 01
- 02
- 03
- 04
- 05
- 06
- 07
- 08
- 09
- 10
- 11
- 12
- 13
- 14
- 15
- 16
- 17
- 18
- 19
- 20

Strong power and spindle lock

400W
27 000 RPM
Power regulation

Less fatigue and precise work with vibration below 2,5 m.s⁻²



Fast and secure spindle lock system made of metal ring




Designed for safety and ergonomics

RC7028
RC7048



DIE GRINDER ERASER

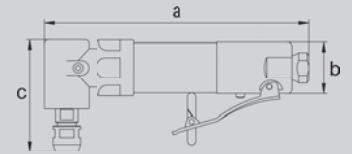

Model RC7068
Part# 8951000329

| Model | RC7068 |
|----------------------------|-----------------------|
| Collet | 6 mm |
| Power | 400 W |
| Speed | 2800 rpm |
| Weight | 0.95 kg |
| Hose | 8 mm |
| Dimensions axbxc | 217x72x43 mm |
| Air cons. | 228 l/min |
| Air cons. | 900 l/min |
| Air inlet | 1/4" IG |
| Sound LpA | 96.1 dB(A) |
| Vibration | 4.05 m/s ² |
| 400 Watt - 2800 rpm | |



- Low speed die grinder providing huge working torque
- 2800 RPM with speed regulator
- "Beast" design rubber handle
- Rear exhaust
- Safety trigger

Model RC7684
Part# 8951000115

| Model | RC7684 |
|-----------------------------|-----------------------|
| Collet | 6 mm |
| Power | 250 W |
| Speed | 20000 rpm |
| Weight | 0.52 kg |
| Hose | 8 mm |
| Dimensions axbxc | 120x125x42 mm |
| Air cons. | 350 l/min |
| Air cons. | 470 l/min |
| Air inlet | 1/4" IG |
| Sound LpA | 80.1 dB(A) |
| Vibration | 4.02 m/s ² |
| 250 Watt - 20000 rpm | |



- Pistol grinder with good power transmission (no angle gear)
- With silencing exhaust hose system, for extra reduced noise and no disturbing exhausted air
- 3 mm collet as extra accessory available

Model Part#
RC7684RE 8951000118

Pistol grinder with exhaust hose DUS35

Model Part#
RC7686RE 8951000119

Pistol Die Grinder Set with:

- 6 mm collets pistol die grinder model RC7684RE with silencing exhaust hose system model DUS35
- Backing pads 50 mm and 75 mm with Roll-On quick assembly system
- 5 abrasive felt 50 mm
- 5 abrasive felt 75 mm
- 3 "Bristle" disk (K50/K80/K120)
- 1 oil bottle
- 1 tool box




Model RC7038
Part# 8951000328

| Model | RC7038 |
|---------------------------------------|---------------------------|
| Spindle Size | 3/8"-24 male 5/16" female |
| Power | 400 W |
| Speed | 2800 rpm |
| Weight | 0.92 kg |
| Hose | 8 mm |
| Dimensions axbxc | 210x72x43 mm |
| Air cons. | 500 l/min |
| Air cons. | 918 l/min |
| Air inlet | 1/4" IG |
| Sound LpA | 86 dB(A) |
| Vibration | 4.5 m/s ² |
| Erasing of adhesives and vinyl | |



- Efficient tool for renovation of painted surfaces with a slim eraser wheel
- No danger for the painted surface – please follow the instruction manual strictly (clean and dust-free, do not press)
- Low speed erasing due to the powerful planetary gear avoids heating up
- Good grip due to integrated rubber patches
- Lever sinks plainly into the housing



Collet



Shaft Part# 8951011483
3 mm for model: RC7051

Shaft Part# 8951011460
3 mm for model: RC7009, RC7028, RC7048, RC7128, RC7058, RC7684

Shaft Part# 8951011477
1/8" for model: RC7009, RC7028, RC7048, RC7128, RC7058, RC7684

Shaft Part# C139289
6 mm for model: RC7009, RC7028, RC7048, RC7128, RC7058, RC7684

Shaft Part# C138727
1/4" for model: RC7009, RC7028, RC7048, RC7128, RC7058, RC7684

Shaft Part# 8940174848
8 mm for model: RC7009, RC7028, RC7048, RC7128, RC7058, RC7684

Carborundum grinding points



Shaft Part# 8951011574
6 mm Content 5 pcs.

Roloc® bristle discs



Grain Part# 8951011633
K50 Diameter: 50 mm (2")
Quantity: 5 pcs.
Color: green

Grain Part# 8951011635
K80 Diameter: 50 mm (2")
Quantity: 5 pcs.
Color: yellow

Grain Part# 8951011634
K120 Diameter: 50 mm (2")
Quantity: 5 pcs.
Color: white

Roloc® backing pad



Shaft Part# 8951011629
6 mm Diameter: 15 mm (1/2") 1-piece

Shaft Part# 8951011631
6 mm Diameter: 50 mm (2") 2-piece

Shaft Part# CA158102
1/4"-20 UNC IG Diameter: 75 mm (3") 1-piece for 7681K

Roloc® abrasive felt




Model Part# 8951011557
Roloc, siafix Diameter: 50 mm (2")
Quantity: 5 pcs.

Model Part# 8951011558
Roloc, siafix Diameter: 75 mm (3")
Quantity: 5 pcs.

- 01
- 02
- 03
- 04
- 05
- 06
- 07
- 08
- 09
- 10
- 11
- 12
- 13
- 14
- 15
- 16
- 17
- 18
- 19
- 20

RODCRAFT MBX-REMOVAL SYSTEM

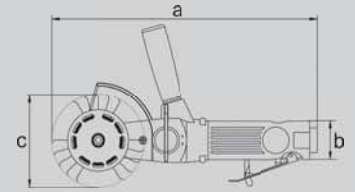

Model RC7091
Part# 8951176010

| | | |
|------------------|--|------------------------|
| Model | | RC7091 |
| Power | | 420 W |
| Speed | | 3500 rpm |
| Weight | | 1.1 kg |
| Hose | | 8 mm |
| Dimensions axbxc | | 275x95x40 mm |
| Air cons. | | 110 l/min |
| Air cons. | | 670 l/min |
| Air inlet | | 1/4" IG |
| Sound LpA | | 83.2 dB(A) |
| Vibration | | < 2,5 m/s ² |

MBX Automotive Set



RODCRAFT MBX

A patented system with tool and accessory program. With and without sand blasting effect (without sand) for removing rust, under body coating, paint, sealants and various types of stickers, decals, trim lines or vinyl adhesives.

Set RC7091 consists of:

- 1 machine
- 1 adapter wheel 11 mm 8951011648
- 1 adapter wheel 23 mm 8951011647
- 1 brush belt black 11 mm 8951011664*
- 1 brush belt black 23 mm 8951011663*
- 1 brush belt ocre 11 mm 8951011666*
- 1 brush belt green 11 mm 8951011668*
- 1 eraser wheel 23 mm 8951011652

* when reordered only available with content of 5 pcs.



- Model (Part#)
- ZU002** (8951011650)
work place rack
accessories not included
- ZU003** (8951011651)
stone for resharpening,
for all angled MBX brush belts

ERASING



Cold removing:
vynils, decals, trims, stickers without damaging the paint surface - no heating up!



Width 23 mm

- Model (Part#)
- ZU014** (8951011649) content 5 pcs.
- ZU010** (8951011652) content 1 pcs.



Eraser wheel

Removal of vinyl, glue, stickers, decals, trim lines, double sided adhesive tape from painted sheet metal, fibreglass, glass, wood, aluminium.

Not good for use on polyethylene, polypropylene, acryl, plexiglass. The manufacturer cannot be held liable for use on any of these materials - if in doubt test on specimen area first.

SPECIAL FINE



Removing:
paint and corrosion. For working on aluminium car bodies and non-ferrous metal parts. With and without sand blasting effect!



Width 23 mm

- Model (Part#)
- BU018-5** (8951011671) content 5 pcs.
straight Ø 0,5 mm stainless steel

- BU019-5** (8951011669) content 5 pcs.
angled, sand blast effect
Ø 0,5 mm stainless steel

Width 11 mm


(Especially for difficult to reach spots, like 90° angles)

- Model (Part#)
- BU031-5** (8951011672) content 5 pcs.
straight Ø 0,5 mm stainless steel

- BU030-5** (8951011670) content 5 pcs.
angled, sand blast effect
Ø 0,5 mm stainless steel


Straight version:

Stripping paint and corrosion from aluminium parts (car, truck or bus body). Very versatile and selective the brush belt does not remove structures like rivet heads, screws etc. and can be used easily on contours. With or without sand blasting effect.



Angled version:

Stripping paint and corrosion from aluminium parts (car, truck or bus body). Very versatile and selective the brush belt does not remove structures like rivet heads, screws etc. and can be used easily on contours. With or without sand blasting effect.



Made in Germany



FINE

Removing:
paint, coatings (eg sealants) and rust without sand blasting effect!



Width 23 mm
Model (Part#)

BU017-5 (8951011667) content 5 pcs.
straight, hardened tip
Ø 0,5 mm spring steel

Width 11 mm

(Especially for difficult to reach spots, like 90° angles)
Model (Part#)

BU028-5 (8951011668) content 5 pcs.
straight, hardened tip
Ø 0,5 mm spring steel

Rust removal and cleaning, taking gaskets away from casted iron but not suited for aluminium sheet metal or casted aluminium! Without sand blasting effect. 11 mm version strips paint even in contoured areas, in corners and removes protective coatings from sheet metals before welding them e.g. into the car body.



MEDIUM

Removing:
rust and oxides with fine sand blasting effect. Works also in corners and confined areas.



Width 23 mm
Model (Part#)

BU022-5 (8951011665) content 5 pcs.
angled, sharpened, hardened
sand blasting effect
Ø 0,5 mm spring steel
lifetime can be extended by resharpening

Width 11 mm

(Especially for difficult to reach spots, like 90° angles)
Model (Part#)


BU021-5 (8951011666) content 5 pcs.
angled, sharpened, hardened
sand blasting effect
Ø 0,5 mm spring steel
lifetime can be extended by resharpening

High efficiency rust removal brush belts, cleaning even porous surfaces and on difficult to reach spots, like 90° corners.



COARSE

Removing:
under body coating, sealants as well as thick paint. With very coarse sand blasting effect!

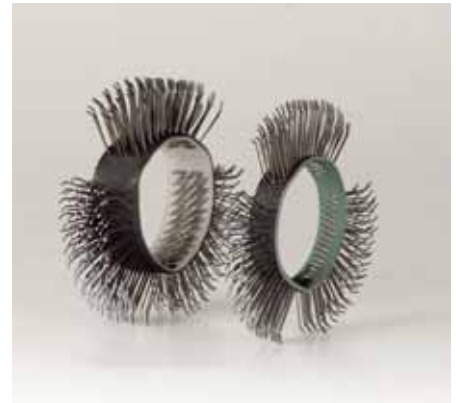

Width 23 mm
Model (Part#)

BU015-5 (8951011663) content 5 pcs.
angled, sharpened,
hardened tip, sand blasting effect
Ø 0,7 mm spring steel
lifetime can be extended by resharpening

Width 11 mm

(Especially for difficult to reach spots, like 90° angles)
Model (Part#)

BU020-5 (8951011664) content 5 pcs.
angled, sharpened,
hardened tip, sand blasting effect
Ø 0,7 mm spring steel
lifetime can be extended by resharpening












Removal of under body coatings and sealants, stripping paint. Very well suited for welding seam areas, contours and corners - with sand blasting effect.



01
02
03
04
05
06
07
08
09
10
11
12
13
14
15
16
17
18
19
20

| Model | Part# | |
|----------|------------|-----------|
| RC7072RE | 8951075270 | 19000 rpm |
| RC7077RE | 8951075310 | 3400 rpm |

| Model | Part# |
|----------|------------|
| RC7075RE | 8951075290 |

| Model | RC7072RE | RC7077RE |
|------------|---|-----------------------|
| Collet |  10 mm | 10 mm |
| Power |  400 W | 400 W |
| Speed |  19000 rpm | 3400 rpm |
| Weight |  0.65 kg | 0.8 kg |
| Hose |  8 mm | 8 mm |
| Dim. axbxc |  232x43x35 mm | 232x40x44 mm |
| Air cons. |  410 l/min | 410 l/min |
| Air cons. |  520 l/min | 520 l/min |
| Air inlet |  1/4" IG | 1/4" IG |
| Sound LpA |  74.8 dB(A) | 74 dB(A) |
| Vibration |  3.04 m/s ² | 5.32 m/s ² |

Tyre buffering with 10 mm quick chuck














- Easy to control handle form
- Slow running powerful planetary gear
- "RE" models are equipped with a silencing
- Exhaust hose system that takes away the
- Cold air - also avoids rubber dust being
- Distributed, no lubricants from the compressed
- Air can get onto the cleanly buffed surface, that
- Should be ready for vulcanisation
- Equipped with 10 mm quick chuck

Accessories for tyre buffer

10 mm quick chuck brand Röhms®
Part# 8951011458



| Model | RC7075RE |
|------------------|---|
| Collet |  11 mm |
| Power |  400 W |
| Speed |  3400 rpm |
| Weight |  0.8 kg |
| Hose |  8 mm |
| Dimensions axbxc |  340x40x32 mm |
| Air cons. |  410 l/min |
| Air cons. |  520 l/min |
| Air inlet |  1/4" IG |
| Sound LpA |  74.1 dB(A) |
| Vibration |  5.58 m/s ² |


Tyre buffering with 11 mm hex. quick chuck



- Easy to control handle form
- Slow running powerful planetary gear
- "RE" models are equipped with a silencing
- Exhaust hose system that takes away the cold air - also avoids rubber dust being distributed, no lubricants from the compressed air can get onto the cleanly stuffed surface, that should be ready for vulcanisation
- Version 7078RE for high radial forces (with extra heavy duty front bearing)
- Equipped with quick change chucks with threaded adapter 3/8"-24

11 mm hexagonal chuck part# 8951011463
Automatically centering chuck/adaptor for extremely high power without slipping. Accessories and grinding wheels e.g. for tyre buffing can be quickly exchanged. Including an adaptor for the use of drill chucks 3/8"-24.





Model RC7681K
Part# 8951000019

Model RC7150
Part# 8951072021

Model RC7120
Part# 8951072001

| | |
|------------------|----------------------|
| Model | RC7681K |
| Drive | 1/4" - 20UNC AG |
| Disc | 50 - 75 mm |
| Power | 150 W |
| Speed | 15000 rpm |
| Weight | 0.4 kg |
| Hose | 8 mm |
| Dimensions axbxc | 120x125x42 mm |
| Air cons. | 365 l/min |
| Air cons. | 490 l/min |
| Air inlet | 1/4" BSP IG |
| Sound LpA | 74.6 dB(A) |
| Vibration | 5.9 m/s ² |

Direct Drive - Composite



- For spot repairs - paint repairs limited to a small area, saving time and consumables
- Lightweight and handy tool with composite housing
- Speed regulator with thumb knob for one hand operation
- Air exhaust down motor housing

Set RC7681 consists of:

- 1 Pistol grinder
- 1 backing pad 50 mm (2") Roloc®
- 1 backing pad 75 mm (3") Roloc®
- 1 abrasive 50 mm (2") fine
- 1 abrasive 75 mm (3") fine
- 1 abrasive 50 mm (2") medium
- 1 abrasive 75 mm (3") medium
- 1 abrasive 50 mm (2") coarse
- 1 abrasive 75 mm (3") coarse
- 1 tool box

| | |
|------------------|--------------------------------|
| Model | RC7150 |
| Drive | 7/16" - 20AG |
| Disc x hole | 75x22 mm, 105x22 mm, 115x22 mm |
| Power | 500 W |
| Speed | 18000 rpm |
| Weight | 1.15 kg |
| Hose | 8 mm |
| Dimensions axbxc | 152x157x38 mm |
| Air cons. | 410 l/min |
| Air cons. | 570 l/min |
| Air inlet | 1/4" BSP IG |
| Sound LpA | 71 dB(A) |
| Vibration | 3.2 m/s ² |

For flexible fibre disc up to 115 mm



- Fast pistol sander with adjustable speed (and power) for fibre discs
- For safety reasons this tool cannot be used with hard cutting and grinding discs, please see our models 7160 - 7166 with speed governor

Accessories for RC7150

| | Model | Part# |
|-------------------------|--------|------------|
| Protective guard | 7150-S | 8951011538 |
| Backing pad 75 x 22 mm | 316-2 | 8951011544 |
| Backing pad 105 x 22 mm | 416-2 | 8951011545 |
| Backing pad 125 x 22 mm | 516-2 | 8951011548 |



| | |
|------------------|----------------------|
| Model | RC7120 |
| Drive | 5/8" AG |
| Disc | 178 mm |
| Power | 500 W |
| Speed | 4500 rpm |
| Weight | 2 kg |
| Hose | 8 mm |
| Dimensions axbxc | 320x38x100 mm |
| Air cons. | 525 l/min |
| Air cons. | 700 l/min |
| Air inlet | 1/4" IG |
| Sound LpA | 91.4 dB(A) |
| Vibration | 2.7 m/s ² |

For flexible fibre disc up to 178 mm




- With 5/8" thread and 178 mm backing pad
- Ergonomically optimised angle grinder with cold-insulated handle
- Silencer and rear exhaust
- Easy maintenance grease plug for fast regreasing of the angle gear
- Additional side handle can be mounted on both sides for both left and right handed persons

Accessories for RC7120

Backing pad 170 mm x 5/8" IG *KF129587*



Velcro pad 150 mm x 5/8" IG *8951011554*



01

02

03

04

05

06

07

08

09

10

11

12

13

14

15

16


17

18

19

20

ANGLE GRINDER

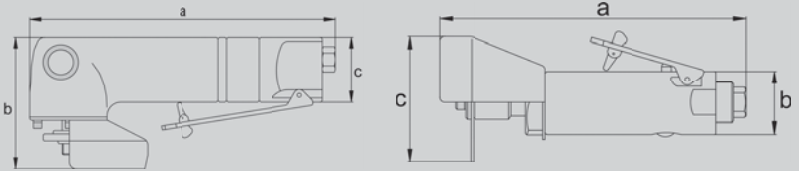

| Model | Part# | |
|--------|------------|--------------------|
| RC7160 | 8951075021 | 100x16 mm |
| RC7166 | 8951075051 | 115x22 - 125x22 mm |

| Model | Part# | |
|--------|------------|----------|
| RC7171 | 8951000210 | 100x16mm |
| RC7172 | 8951000211 | 115x22mm |
| RC7173 | 8951000212 | 125x22mm |

| Model | Part# |
|--------|------------|
| RC7190 | 8951075101 |

| Model | RC7160 | RC7166 |
|-------------|-----------------------|-----------------------|
| Drive | M10x1,5 AG | M14x2,0 AG |
| Disc x hole | 100x16 mm | 115x22 - 125x22 mm |
| Power | 750 W | 750 W |
| Speed | 10000 rpm | 10000 rpm |
| Weight | 1.6 kg | 1.6 kg |
| Hose | 8 mm | 8 mm |
| Dim. axbxc | 232x93x47 mm | 232x93x47 mm |
| Air cons. | 490 l/min | 490 l/min |
| Air cons. | 650 l/min | 650 l/min |
| Air inlet | 1/4" IG | 1/4" IG |
| Sound LpA | 85.2 dB(A) | 85.6 dB(A) |
| Vibration | 4.56 m/s ² | 5.69 m/s ² |

For discs 100 to 125 mm



- Compact angle grinders
- With safety speed governor, protective guard and flanges
- Very versatile for many applications such as sanding with flap discs, grinding, cutting
- Available for 16 or 22 mm centre hole accessories or pads and brushes with thread M14x2
- Side handle for additional control can be taken off for confined areas

Accessories for RC7160 - RC7166 - RC7172 - RC7173

CUTTING DISCS
CONTENT 1 PIECE.



| Model | Size | Part# | For |
|-------|--------|------------|--------|
| 115TR | 115 mm | 8951011539 | RC7166 |

| Model | RC7171 | RC7172 | RC7173 |
|-------------|----------------------|--------------------|----------------------|
| Drive | M10 | M10 | M14 |
| Disc x hole | 100x16 mm | 115x22 mm | 125x22 mm |
| Power | 700 W | 700 W | 700 W |
| Speed | 12000 rpm | 12000 rpm | 12000 rpm |
| Weight | 1.4 kg | 1.5 kg | 1.5 kg |
| Hose | 10 mm | 10 mm | 10 mm |
| Dim. axbxc | 245x80x125 mm | 245x80x125 mm | 245x80x125 mm |
| Air cons. | 324 l/min | 324 l/min | 324 l/min |
| Air cons. | 540 l/min | 540 l/min | 540 l/min |
| Air inlet | 1/4" IG | 1/4" IG | 1/4" IG |
| Sound LpA | 84 dB(A) | 84 dB(A) | 84 dB(A) |
| Vibration | 7,2 m/s ² | 9 m/s ² | 9,4 m/s ² |

For discs 100 to 125 mm



- 700 W
- 1000 hour service interval
- High quality bevel gears & Governed motor
- Rear exhaust (exhaust hose included)
- Streamline composite handle for either right or left handed operation
- Composite grip insulates operator's hand from cold
- Designed for a variety of applications such as sanding with flap discs, grinding and cutting

Grinders Tune up Kit

| Model | Part# |
|--------------|------------|
| RC7171/72/73 | 8950280070 |



Maximum power and optimal speed

Superior durability and performance are granted by the built-in high quality bevel gear with spiral teeth and the governed motor.

| Model | RC7190 |
|------------|-----------------------|
| Drive | 3/8" |
| Disc | 70x10 mm |
| Power | 350 W |
| Speed | 20000 rpm |
| Weight | 0.8 kg |
| Hose | 8 mm |
| Dim. axbxc | 195x80x40 mm |
| Air cons. | 430 l/min |
| Air cons. | 580 l/min |
| Air inlet | 1/4" IG |
| Sound LpA | 89.5 dB(A) |
| Vibration | 3.53 m/s ² |

Mini cutting discs up to 70 mm



- Mini cutting grinder with steel guard and safety lever
- Rear exhaust
- Delivery includes 1 disc


Accessories for RC7190

CUTTING DISCS
CONTENT 1 PIECE



| Model | Size | Part# | For |
|-------|-------|------------|--------|
| 70TR | 75 mm | 8951011536 | RC7190 |

CUTTING GRINDER & BELT SANDER



Model RC7170
Part# 8951000144

Model RC7155
Part# 8951072041

Model RC7156
Part# 8951072051

| | |
|------------------------------------|--------------------|
| Model | RC7170 |
| Drive | 3/8" |
| Disc x hole | 100x10 mm |
| Power | 746 W |
| Speed | 14000 rpm |
| Weight | 1.8 kg |
| Hose | 10 mm |
| Dim. axbxc | 75x110x370 mm |
| Air cons. | 199 l/min |
| Air cons. | 216 l/min |
| Air inlet | 1/4" IG |
| Sound LpA | 86 dB(A) |
| Vibration | 3 m/s ² |
| 4" extended cutting grinder | |

| | |
|--------------------|----------------------|
| Model | RC7155 |
| Belt size | 10x330 mm |
| Power | 300 W |
| Speed | 18000 rpm |
| Weight | 0.8 kg |
| Hose | 8 mm |
| Dim. axbxc | 285x37x22 mm |
| Air cons. | 400 l/min |
| Air cons. | 520 l/min |
| Air inlet | 1/4" BSP IG |
| Sound LpA | 79.5 dB(A) |
| Vibration | 2.5 m/s ² |
| 10 mm belts | |

| | |
|--------------------|----------------------|
| Model | RC7156 |
| Belt size | 20x520 mm |
| Power | 370 W |
| Speed | 17000 rpm |
| Weight | 1.15 kg |
| Hose | 8 mm |
| Dim. axbxc | 353x44x35x22 mm |
| Air cons. | 400 l/min |
| Air cons. | 520 l/min |
| Air inlet | 1/4" BSP IG |
| Sound LpA | 83.2 dB(A) |
| Vibration | 2.4 m/s ² |
| 20 mm belts | |



- 4" = 100 mm for better reach and easy access to restricted areas
- Composite grip to reduce cold air transmission to operators
- Spindle lock system for easier wheel changing
- 11 position adjustable swivel guard – 126° adjustable for better operator protection & greater visibility of cutting operations
- Safety throttle lever to prevent accidental start up
- Supplied with 5 cutting wheels



- Small belt sander for confined areas
- Fast-tensioning mechanism allows exchanging of belts one-handed
- For ergonomic working handle can be adjusted in angle
- Delivery includes 3 belts (grid 80, 100 and 120)



- Tool can be used 100% into corners since the arm does not disturb on the side of the belt
- Fast-tensioning mechanism allows exchanging of belts one-handed
- Ergonomic working handle can be adjusted to different angles
- Continuous work is made more comfortable due to a broad resting plate for the second hand

Accessories for RC7155

10 x 330 mm sanding belt, long



Package content 10 pcs.

| | |
|---------------------|------------|
| 10x330 mm grain 40 | 8951011604 |
| 10x330 mm grain 80 | 8951011570 |
| 10x330 mm grain 120 | 8951011577 |
| 10x330 mm grain 180 | 8951011578 |
| 10x330 mm grain 240 | 8951011579 |

Accessories for RC7156

20 x 520 mm sanding belt, long



Package content 10 pcs.

| | |
|--------------------|------------|
| 20x520mm grain 80 | 8951011580 |
| 20x520mm grain 120 | 8951011581 |
| 20x520mm grain 180 | 8951011582 |
| 20x520mm Korn 240 | 8951011583 |












- 01
- 02
- 03
- 04
- 05
- 06
- 07
- 08
- 09
- 10
- 11
- 12
- 13
- 14
- 15
- 16
- 17
- 18
- 19
- 20

























Model Part#
RC7682 8951000005
RC7682K 8951000018

Model Part#
RC7661V 8951072231

Model Part#
RC7200V 8951072111

| Model | RC7682 |
|---------------------------------|--|
| Disc ø & thread |  50 mm (2") - 75 mm (3") AG |
| Orbit |  5 mm |
| Speed |  15000 rpm |
| Weight |  0.5 kg |
| Hose |  8 mm |
| Dimensions axbxc |  260x165x37 mm |
| Air cons. |  380 l/min |
| Air cons. |  510 l/min |
| Air inlet |  1/4" IG |
| Sound LpA |  79.6 dB(A) |
| Vibration |  8.9 m/s ² |
| Combi sander 5 mm stroke | |

| Model | RC7661V |
|------------------------------------|---|
| Disc ø & thread |  77 mm - 5/16" AG |
| Orbit |  2.5 mm |
| Speed |  10000 rpm |
| Weight |  1 kg |
| Hose |  8 mm |
| Dimensions axbxc |  260x165x37 mm |
| Air cons. |  350 l/min |
| Air cons. |  430 l/min |
| Air inlet |  1/4" IG |
| Sound LpA |  88 dB(A) |
| Vibration |  3.5 m/s ² |
| Stroke 2.5 mm - Spot-Repair | |

| Model | RC7200V |
|---------------------------------|---|
| Disc ø & thread |  150 mm - 5/16" AG |
| Orbit |  5 mm |
| Speed |  10000 rpm |
| Weight |  1.95 kg |
| Hose |  8 mm |
| Dimensions axbxc |  260x165x37 mm |
| Air cons. |  315 l/min |
| Air cons. |  400 l/min |
| Air inlet |  1/4" IG |
| Sound LpA |  86.2 dB(A) |
| Vibration |  8.3 m/s ² |
| Combi sander 5 mm stroke | |



- For spot repairs - paint repairs limited to small areas
- Ergonomic composite housing
- Speed regulator with thumb knob for one hand operation
- Air exhaust down motor housing
- 75 mm pad
- 5 mm stroke

RC7682K **8951000018**
 Content:

- 1 pistol sander
- 1 velcro pad 50 mm (2")
- 1 velcro pad 75 mm (3")
- 10 abrasives 50 mm grain 600
- 10 abrasives 75 mm grain 600
- 10 abrasives 50 mm grain 320
- 10 abrasives 75 mm grain 320
- 10 abrasives 50 mm grain 180
- 10 abrasives 75 mm grain 180
- 1 tool box



- Spot-repair orbital sander with 2,5 mm stroke and small pad
- Ideal for dust enclosures, irregularities or on very rounded surfaces
- Comfortably rounded shape
- Insulating rubber cover and speed regulator
- Equipped with velcro pad



- Combi-tool for coarse sanding and finishing in one
- Can easily be switched from a rotating coarse sander to a random orbital sander with 5 mm stroke
- Equipped with 150 mm velcro pad

Ergonomic, powerful, comfortable - all in one hand!

285 W motor with 5 vanes
for efficient sanding even
with large stroke and coarse grid

Elegantly designed
composite lever

Knob for adjustment of the right
speed for the application,
easy to reach for usability with one hand


Sanders are delivered with
two interchangeable suction
ports with diameters 29
and 27 mm for central dust
extraction units

With high quality bearings
and excellent dust protection
for continuous sanding



15 hole - 150 mm diameter RODCRAFT
micro-velcro pad good for all most used
abrasive sheets (6 hole, 6+1 hole and 8+1 hole).

RC7702V6



| Model | Part# | Orbit |
|----------|------------|--------|
| RC7702V6 | 8951000021 | 2.5 mm |
| RC7705V6 | 8951000020 | 5 mm |
| RC7710V6 | 8951000070 | 10 mm |

| Model | Part# | Orbit |
|-------------|------------|-------|
| RC7705V6-2H | 8951000081 | 5 mm |
| RC7710V6-2H | 8951000082 | 10 mm |

| Model | Part# |
|---------|------------|
| RC7691V | 8951072212 |

| Model | RC7702V6 | RC7705V6 | RC7710V6 |
|-------------------|----------------------|----------------------|--------------------|
| Disc ø & thread | 150 mm - 5/16" AG | | |
| Orbit | 2.5 mm | 5 mm | 10 mm |
| Speed | 10000 rpm | | |
| Weight | 0.825 kg | 0.85 kg | 0.945 kg |
| Hose | 8 mm | | |
| Dim. axbxc | 206x107 mm | | |
| Air cons. average | 450 l/min | | |
| Air cons. cont. | 550 l/min | | |
| Air inlet | 1/4" IG | | |
| Sound LpA | 79.5 dB(A) | 86.1 dB(A) | 79.1 dB(A) |
| Vibration | 3.8 m/s ² | 5.4 m/s ² | 9 m/s ² |


Ergonomic design - Velcro pad 150 mm



- 1 hand orbital sander with ergonomic design
- Innovative swivel for exhaust to allow left and right hand work
- Only 107 mm high
- Insulating thermo rubber against cold and for good grip
- Change speed regulator with one hand while working
- Delivered with two interchangeable suction ports with diameters 29 and 27 mm
- Equipped with 150 mm velcro pad with 15 holes

Accessories for RC77..

| | |
|----------|---------------|
| RC7702V6 | 2,5 mm stroke |
| RC7705V6 | 5,0 mm stroke |
| RC7710V6 | 10 mm stroke |



8955000012

| Model | RC7705V6-2H | RC7710V6-2H |
|-------------------|----------------------|----------------------|
| Disc ø & thread | 150 mm - 5/16" AG | |
| Orbit | 5 mm | 10 mm |
| Speed | 10000 rpm | |
| Weight | 1 kg | 1.1 kg |
| Hose | 8 mm | |
| Dim. axbxc | 315x107 mm | |
| Air cons. average | 450 l/min | |
| Air cons. cont. | 550 l/min | |
| Air inlet | 1/4" IG | |
| Sound LpA | 83.5 dB(A) | |
| Vibration | 5.1 m/s ² | 7.9 m/s ² |


Rear exhaust 5 & 10 mm orbit



- 2 hand orbital sander with ergonomic design
- Innovative swivel for exhaust to allow left and right hand work
- Only 107 mm high
- Insulating thermo rubber against cold and for good grip
- Change speed regulator with one hand while working
- Delivered with two interchangeable suction ports with diameters 29 and 27 mm
- Equipped with 150 mm velcro pad with 15 holes
- Rear exhaust
- 5 mm stroke

Accessories for RC77..-2H

| | |
|-------------|---------------|
| RC7705V6-2H | 5,0 mm stroke |
| RC7710V6-2H | 10 mm stroke |



8955000012

| Model | RC7691V |
|-------------------|----------------------|
| Disc ø & thread | 200 mm - 6xM4 |
| Orbit | 5 mm |
| Speed | 10000 (900) rpm |
| Weight | 2.1 kg |
| Hose | 8 mm |
| Dimensions axbxc | 300x120 mm |
| Air cons. average | 340 l/min |
| Air cons. cont. | 420 l/min |
| Air inlet | 1/4" IG |
| Sound LpA | 88.6 dB(A) |
| Vibration | 2.8 m/s ² |

Composite 200 mm pad




- 200 mm two-hand sanders with powerful 8-vane motor
- Adjustable speed
- Composite material handle
- Motor housing insulated against the transfer of cold – for long sanding operations
- Equipped with a 29 mm suction port for use with central dust extraction
- Orbital sander + rotation: sander that simultaneously rotates the pad as well as moving it on an orbit (gears sanders) – typical for aggressive sanding applications
- Equipped with 200 mm velcro pad with 8 holes 8951012348
- Pad is fixed with 6 bolts

Accessories for RC7691



8951012348

LINEAR SANDER ACCESSORIES



Model RC7500
Part# 8951072101

| | | |
|------------------|--|-----------------------|
| Model | | RC7500 |
| Pad | | 65 x 390 C |
| Stroke | | linear 25 mm |
| Speed | | 3500 rpm |
| Weight | | 2.7 kg |
| Hose | | 8 mm |
| Dimensions axbxc | | 400x170 mm |
| Air cons. | | 200 l/min |
| Air cons. | | 250 l/min |
| Air inlet | | 1/4" IG |
| Sound LpA | | 80.1 dB(A) |
| Vibration | | 21.3 m/s ² |

Combi sander 5 mm stroke




- Tool makes forward-reverse movements for profiling and sanding of surfaces with lots of filler (e.g. repairs of dented car doors)
- Equipped with a non-perforated long sanding pad and clamps for normal abrasives

Non-perforated pads



| øPad (mm) | Thread | Surface | | Model | Part# |
|-----------|----------|---------|--------|--------|------------|
| 50 | 5/16" AG | Velcro | soft | JS2K | 8951011561 |
| 50 | 5/16" AG | Velcro | medium | | 8955000007 |
| 75 | 5/16" AG | Velcro | soft | JS3WK | 8951011560 |
| 75 | 5/16" AG | Velcro | medium | | 8955000006 |
| 150 | 5/16" AG | Velcro | soft | JS6WK | 8951011566 |
| 150 | 5/8" IG | Velcro | soft | KT-150 | 8951011554 |

Perforated pads

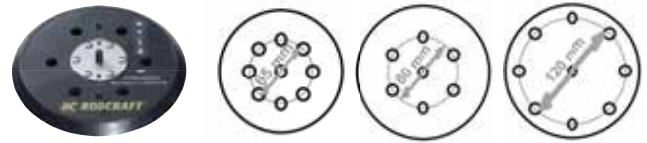

| øPad (mm) Holes | Thread | Diam. circle of holes (mm) | Surface | | Model | Part# |
|--------------------|----------|----------------------------|---------|-----------|-----------|-------------|
| 125 / 8 | 5/16" AG | 65 | Velcro | medium | EPA125M8V | 8951011642 |
| 125 / 8 | 5/16" AG | 65 | Velcro | very soft | EPA125S8V | 8951011643 |
| 150 / 6 | 5/16" AG | 80 | Velcro | soft | JS6GWK | 8951011567 |
| 150 / 6 | 5/16" AG | 80 | Velcro | hard | JS6GHKF | 8951011599 |
| 150 / 6+1 | 5/16" AG | 80 | Velcro | hard | EPA150H6V | 8951011636 |
| 150 / 6+1 | 5/16" AG | 80 | Velcro | medium | EPA150M6V | 8951011638 |
| 150 / 14+1 | 5/16" AG | 80 / 120 | Velcro | hard | | 8955000012 |
| 200 / 8 | - | 120 | Velcro | very hard | | 8951012348* |

* only to be used with RC7691V

Sanders Tune up Kit

| Model | Part# |
|------------------|------------|
| RC7682 SMART REP | 8950280015 |
| RC7682K | 8950280015 |
| RC7705V6 | 8950280041 |
| RC7702V6 | 8950280041 |
| RC7710V6 | 8950280041 |
| RC7805V6 | 8950280041 |

01
02
03
04
05
06
07
08
09
10
11
12
13
14
15
16
17
18
19
20

Model Part#
7905 8951000016

Model Part#
7910 8951089014

| | |
|------------------------|--------------------------|
| Model | 7905 |
| Peak power/ Power | 1400/1200 W |
| Tank | 21 L |
| Suction flow | 215 m³/h - 3583 l/min |
| Suction height (water) | 2400 mm H ₂ O |
| Electr. sockets | 1x2000 W |
| Filter surface | 2700 cm² |
| Dimensions | 415x415x550 mm |
| Weight | 10 kg |
| Air supply pressure | 4 - 16 bar |
| Sound LpA | 65 dB(A) |

| | |
|------------------------|--------------------------|
| Model | 7910 |
| Peak power/ Power | 2600/2300 W |
| Tank | 77 L |
| Suction flow | 430 m³/h - 7150 l/min |
| Suction height (water) | 2400 mm H ₂ O |
| Electr. sockets | 2x600 W |
| Filter surface | 5700 cm² |
| Dimensions | 608x608x1060 mm |
| Weight | 25,1 kg |
| Air supply pressure | 4 - 15 bar |
| Sound LpA | 67 dB(A) |

Accessories 7905 & 7910

Model Part#
7910VD 8951011130



compressed air distributor with 2 air multi-profile couplers

Model Part#
7900/10SC 8951011102



5 m suction hose 29 mm

Model Part#
205SE 8951011111



5 m suction hose 29 mm with integrated air supply hose

- The dust extraction units comply with class "L" requirements for filters (according to EN 60335-2-69:1999-08)
- The air tools and electrical tools can be attached directly onto the energy supply from the vacuum station
- Automatic stop for vacuum (10 sec delay) after switching off all connected tools. The vacuum hose is emptied, avoiding clogs. Easy remote controlled start of the vacuum system from any connected tool as soon as one of them is started
- Equipped for wet and dry applications with integrated sensor

- Compact version with 21L tank
- 1 motor by-pass cooled
- 1 electrical socket
- 1 suction hose model 7900/10SC
- With nylon bag and class L fleece filter

- 77 L tank
- 2 motors two-step (operation with one motor possible to save energy) – by-pass cooled
- 2 electrical sockets and diverter for 2 suction hoses with nylon bag and class L fleece filter
- Basket for accessories or sander
- Practical joint to tilt the tank for fast and easy emptying
- Sufficient vacuum to work with 2 sanders
- Simultaneously - possible to operate 2 air tools with compressed air when using an additional air diverter model 7910VD (part# 8951011130)



Accessories for 7905

| Model | Part# |
|---|------------|
| 7900SF | 8951011100 |
| <i>Included in delivery</i> | |
|  | |
| standard filter (polyestervleece class L – 5700 cm ²) | |

| Model | Part# |
|---|------------|
| 7900PB | 8951011098 |
|  | |
| dust bags made of filter paper (5 pcs.) | |

| Model | Part# |
|---|------------|
| 7900SBP | 8951011103 |
|  | |
| dust bags made of polyester (5 pcs.) | |

Accessories for 7910

| Model | Part# |
|---|------------|
| 7910SF | 8951011101 |
| <i>Included in delivery</i> | |
|  | |
| standard filter (polyestervleece class L – 5700 cm ²) | |

| Model | Part# |
|---|------------|
| 7910PB | 8951011099 |
|  | |
| dust bags made of filter paper (5 pcs.) | |

| Model | Part# |
|---|------------|
| 7910SBP | 8951011104 |
|  | |
| dust bags made of polyester (5 pcs.) | |

| Model | Part# |
|---|------------|
| 7900/10K | 8951011131 |
|  | |
| click-connector (dust extraction unit - hose) | |

- 01
- 02
- 03
- 04
- 05
- 06
- 07
- 08**
- 09
- 10
- 11
- 12
- 13
- 14
- 15
- 16
- 17
- 18
- 19
- 20



RC7683

09| Polishing

| Polishers

- Pistol polisher
- Angle polisher

| Accessories

- Discs
- Sponges
- Woolpads

01

02

03

04

05

06

07

08

09

10

11

12

13

14

15


16

17

18

19













20



Model Part#
RC7683K 8951000017
RC7683 8951000004

Model Part#
RC7130 8951072004

Polishing system

| | | |
|------------------|---|----------------------|
| Model | | RC7683K / RC7683 |
| Drive |  | 5/16"-24UNF IG |
| Disc |  | 75 mm |
| Power |  | 150 W |
| Speed |  | 5500 rpm |
| Weight |  | 0.6 kg |
| Hose |  | 8 mm |
| Dimensions axbxc |  | 120x125x42 mm |
| Air cons. |  | 360 l/min |
| Air cons. |  | 480 l/min |
| Air inlet |  | 1/4" BSP IG |
| Sound LpA |  | 78.5 dB(A) |
| Vibration |  | 3.8 m/s ² |

Direct Drive - Composite



- For spot repairs - paint repairs limited to a small area, saving time and consumables
- Lightweight and handy tool with composite housing
- Speed regulator with thumb knob for one hand operation
- Air exhaust down motor housing

Set RC7683K consists of:

- 1 pistol polisher
- 1 velcro pad 75 mm (3")
- 1 soft sponge white 75 mm (3")
- 1 sponge yellow 75 mm (3")
- 1 wool pad 75 mm (3")



Polishers Tune up Kit

| Model | Part# |
|------------------|------------|
| RC7683 SMART REP | 8950280016 |
| RC7683K | 8950280016 |

| | | |
|------------------|--|----------------------|
| Model | | RC7130 |
| Drive | | 5/8" AG |
| Disc | | 178 mm |
| Power | | 500 W |
| Speed | | 2500 rpm |
| Weight | | 2 kg |
| Hose | | 8 mm |
| Dimensions axbxc | | 320x38x100 mm |
| Air cons. | | 525 l/min |
| Air cons. | | 700 l/min |
| Air inlet | | 1/4" IG |
| Sound LpA | | 87.9 dB(A) |
| Vibration | | 6.9 m/s ² |

Flat head pad 178 mm



- 170 mm (7") heavy duty angle polisher with 5/8" spindle and low head height including
- A fully rounded polishing pad diameter 170 mm (7")
- A lamb wool polishing bonnet (to tie with strap)
- Insulated main handle and soft grip side handle
- Rear exhaust
- Aluminum alloy housing, sturdy but lightweight tool
- Quality spiral bevel gearing and grease plug screw for the angle

75 mm velcro 5/16"




Disc
Part#: 8951011560



Felt
Part#: 8951011556

150 mm velcro 5/8"



Disc
Part#: 8951011554




wool (velcro)
Part#: 8951011586

150-170 mm to tie 5/8"



160 mm

Hard sponge disc
Part#: 8951011551



170 mm

Disc (rounded)
Part#: 8951011549



Wool (to tie)
Part#: 8951011550

Complete pack for headlights RC7210 Kit Part#8951000296



Sanding:
1 RC7682 with 60 sanding papers



High quality case
with removable foam
compatible with tool
drawer



Polishing:
1 RC7683 with hard
and soft sponge and
polish cream



Recharge pack (8940174744)
20 headlights renew with
1 recharge pack of accessories



Perfect finish in 10 mn



RC7210

01
02
03
04
05
06
07
08
09
10
11
12
13
14
15
16
17
18
19
20



RC6605

10| Car glass removal

| Glass removal tools

- Oscillating cutter
- Manual glass removal tool
- Single suction cup
- Suction cup set

| Accessories

- Blades

01

02

03

04

05

06

07

08

09

10

11

12

13

14

15

16


17

18












19

20

CAR GLASS REMOVAL TOOLS SUCTION CUPS



Model RC6605RE
Part# 8951074005

| Model | RC6605RE | |
|---|---|----------------------------|
| Head Interface |  | 2 x hex s = 19 e = 21.9 mm |
| Blade Interface |  | e=22 mm |
| Oscillations |  | 20000 min ⁻¹ |
| Weight |  | 0.8 kg |
| Hose |  | 8 mm |
| Dimension axbxc |  | 180x40x67 mm |
| Air cons. |  | 370 l/min |
| Air cons. |  | 530 l/min |
| Air inlet |  | 1/4" IG |
| Sound LpA |  | 79.8 dB(A) |
| Vibration |  | 5.37 m/s ² |
| Oscillating movement 20.000 / min. | | |



- Versatile cutter, scraper and saw called "UNICUTTER"
- Well suited for removal of windscreens and other glued parts
- A silencing exhaust hose system is included in the delivery

Model RC6606RE
Part# 8951174000














Oscillating Cutter (UNICUTTER) Set in tool box including:

- 1 cutter model RC6605RE with silencing exhaust hose system
- 1 blade model U24
- 1 blade model U36
- and keys

* for reordering only available with content 2 pcs

Model RC6610
Part# 8951074000

| Model | RC6610 | |
|---|---|----------------------------|
| Head Interface |  | 2 x hex s = 19 e = 21.9 mm |
| Blade Interface |  | e=22 mm |
| Oscillations |  | 20000 min ⁻¹ |
| Weight |  | 1.3 kg |
| Hose |  | 8 mm |
| Dimension axbxc |  | 180x40x67 mm |
| Air cons. |  | 500 l/min |
| Air cons. |  | 800 l/min |
| Air inlet |  | 1/4" IG |
| Sound LpA |  | 86.9 dB(A) |
| Vibration |  | 5.38 m/s ² |
| Oscillating movement 20.000 / min. | | |



- Large version of model 6605, e.g. for truck and bus windscreens and other glued car glass (without silencing exhaust hose system)



Model Part#
AGS185 8951089055

Manual glass removal

- Autoglass kit with square wire for removal of windscreens and rear windows etc.
- Dimension of wire material 0,6 x 0,6 mm
- Includes an angled manual blade with extra pull handle on short cable
- Delivered with wire handles, punch, clip remover level and trim lifting claw

- **50 m wire AGD186** 8951011085



Model Part#
STS70k 8951089056

Suction cup max. 40 kg

- Single suction cup especially suited for working in confined areas
- Can be used on glass, boards, sheet metal



Model Part#
STS71K 8951011087


Suction cup max. 80 kg

- Two double suction cups for transport, assembly
- And disassembly of car windscreens, rear windows
- Self-adapting to the 3 dimensional shape of the glass
- Ratchet strap for fixation of the windscreen for additional safety.


5 m strap 8951011088
Spare rubber 8951011090




115 mm




Model **U27**
Part Number 8956001320
Cutting Edge length 24 mm

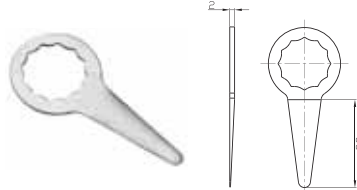


Model **G36**
Part Number 8956001323
Cutting Edge length 35 mm

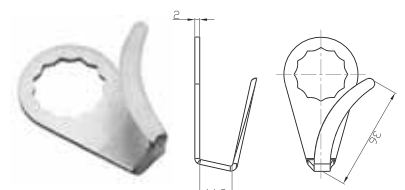


Model **U37**
Part Number 8956001328
Cutting Edge length 36 mm



Model **G58**
Part Number 8956001322
Cutting Edge length 53,5 mm

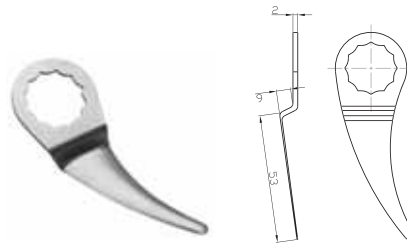


Model **K28**
Part Number 8956001326
Cutting Edge length 53 mm

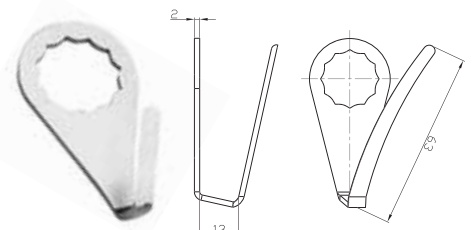

Model **U64**
Part Number 8956001324
Cutting Edge length 63 mm



Model **G95**
Part Number 8956001321
Cutting Edge length 90 mm

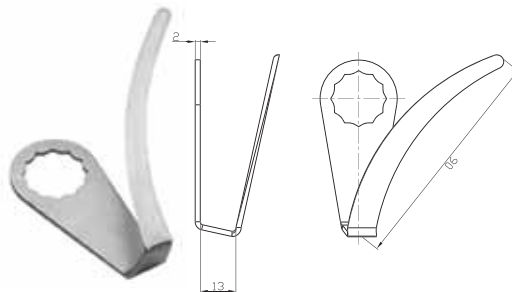

Model **U95**
Part Number 8956001325
Cutting Edge length 90 mm



Model **UG-SET**
Part Number 8956001327
Set of 7 blades for all applications, contains: U95, U64, U37, U27, G36, G58, G95

01
02
03
04
05
06
07
08
09
10
11
12
13
14
15
16
17
18
19
20



RC8106

11| Painting

| Paint guns

- Paints guns 0,125 l cup
- Paints guns 0,6 l cup
- HVLP paint guns

| Accessories

- Nozzle Sets

01

02

03

04

05

06

07

08

09

10

11

12

13

14

15


16

17

18

19












20

























Model Part#
RC8103-08 8951070012

Model Part#
RC8102-14 8951070002

Model Part#
RC8106-13 8951070011

| Model | RC8103-08 | |
|------------------------------------|---|------------------------|
| Cup |  | 0.125 Litre |
| Nozzle |  | 0.8 mm |
| Max. Pressure |  | 2 bar |
| Weight |  | 0.45 kg |
| Hose |  | 8 mm |
| Dimensions axbxc |  | 128x240 mm |
| Air cons. |  | 100 l/min |
| Air cons. |  | 140 l/min |
| Air inlet |  | 1/4" AG |
| Sound LpA |  | <70 dB(A) |
| Vibration |  | < 2.5 m/s ² |
| Pico-Speed - Mini paint gun | | |

| Model | RC8102-14 | |
|-------------------------|---|------------------------|
| Cup |  | 0.6 Litre |
| Nozzle |  | 1,4 HVLP mm |
| Max. Pressure |  | 2 - 4 bar |
| Weight |  | 0.75 kg |
| Hose |  | 8 mm |
| Dimensions axbxc |  | 180x340 mm |
| Air cons. |  | 260 l/min |
| Air cons. |  | 370 l/min |
| Air inlet |  | 1/4" AG |
| Sound LpA |  | <70 dB(A) |
| Vibration |  | < 2.5 m/s ² |
| Rod-Speed 1,4 mm | | |

| Model | RC8106-13 | |
|---------------------------------|---|------------------------|
| Cup |  | 0.6 Litre |
| Nozzle |  | 1,3 HVLP mm |
| Max. Pressure |  | 2 bar |
| Weight |  | 0.75 kg |
| Hose |  | 8 mm |
| Dimensions axbxc |  | 180x369 mm |
| Air cons. |  | 210 l/min |
| Air cons. |  | 300 l/min |
| Air inlet |  | 1/4" AG |
| Sound LpA |  | <70 dB(A) |
| Vibration |  | < 2.5 m/s ² |
| Rod-Speed HVLP - fogless | | |



- 0,125 L plastic cup
- Equipped with nozzle 0,8 mm
- Adjustable spray pattern (round, wide, swivelling nozzle head)
- Screw to limit paint volume
- Precise dosage trigger
- Air flow valve



- 0,6 L plastic cup
- Equipped with nozzle 1,4 mm
- Adjustable spray pattern (round, wide, swivelling nozzle head)
- Screw to limit paint volume
- Precise dosage trigger
- Air flow valve

Also available as:
RC8102/17 with 1,7 mm nozzle 8951070032
RC8102/20 with 2,0 mm nozzle 8951070042
RC8102/25 with 2,5 mm nozzle 8951070052



- RC8102 with paint optimising system "HVLP"
- 0,6 L plastic cup
- Equipped with nozzle 1,3 mm
- Adjustable spray pattern (round, wide, Swivelling nozzle head)
- Screw to limit paint volume
- Precise dosage trigger
- Air flow valve
- Includes mini pressure regulator with gauge

Also available as:
RC8106/20 with 2,0 mm nozzle 8951070041

Accessories for RC8103




| | Part# |
|-----------------------|------------|
| Nozzle set 0,5 mm | 8951011708 |
| Nozzle set 0,8 mm | 8951011709 |
| Nozzle set 1,0 mm | 8951011710 |
| Cup 0,125 l incl. lid | 8951011711 |

Accessories for RC8102














| | Part# |
|---------------------|------------|
| Nozzle set 1,4 mm | 8951011703 |
| Nozzle set 1,7 mm | 8951011704 |
| Nozzle set 2,0 mm | 8951011705 |
| Nozzle set 2,5 mm | 8951011706 |
| Cup 0,6 l incl. lid | 8951011695 |
| Gasket kit | 8951011707 |

Accessories for RC8106



| | Part# |
|----------------------|------------|
| Nozzle set 1,3 mm: | 8951011713 |
| Nozzle set 1,7 mm: | 8951011714 |
| Nozzle set 2,0 mm: | 8951011715 |
| Cup 0,6 l incl. lid: | 8951011695 |
| Paint filter 1 piece | 8951011707 |
| Regulator with gauge | 8951011716 |

Model Part#
RC8107-14 8951070021

| | | |
|------------------|---|------------------------|
| Model | | RC8107-14 |
| Cup |  | 0.6 Litre |
| nozzle |  | 1.4 mm HVLP |
| max. Pressure |  | 3 bar |
| Weight |  | 1 kg |
| Hose |  | 8 mm |
| Dimensions axbxc |  | 187x415 mm |
| Air cons. |  | 150 l/min |
| Air cons. |  | 380 l/min |
| Air inlet |  | 1/4" AG |
| Sound LpA |  | <70 dB(A) |
| Vibration |  | < 2.5 m/s ² |

HVLP tilting cup




- RC8102 with paint optimising system "HVLP"
- 0,6 l plastic cup equipped with nozzle 1,4 mm
- Adjustable spray pattern (round, wide, swivelling nozzle head)
- Screw to limit paint volume
- Precise dosage trigger
- Air flow valve
- Includes mini pressure regulator with gauge
- For working overarm with swivel joint for tilting the cup

Accessories for RC8107



| | Part# |
|----------------------|------------|
| Nozzle set 1,7 mm | 8951011718 |
| Nozzle set 2,0 mm | 8951011719 |
| Cup 0,6 l incl. lid | 8951011720 |
| Regulator with gauge | 8951011716 |

Painting made easy with various adjustments!

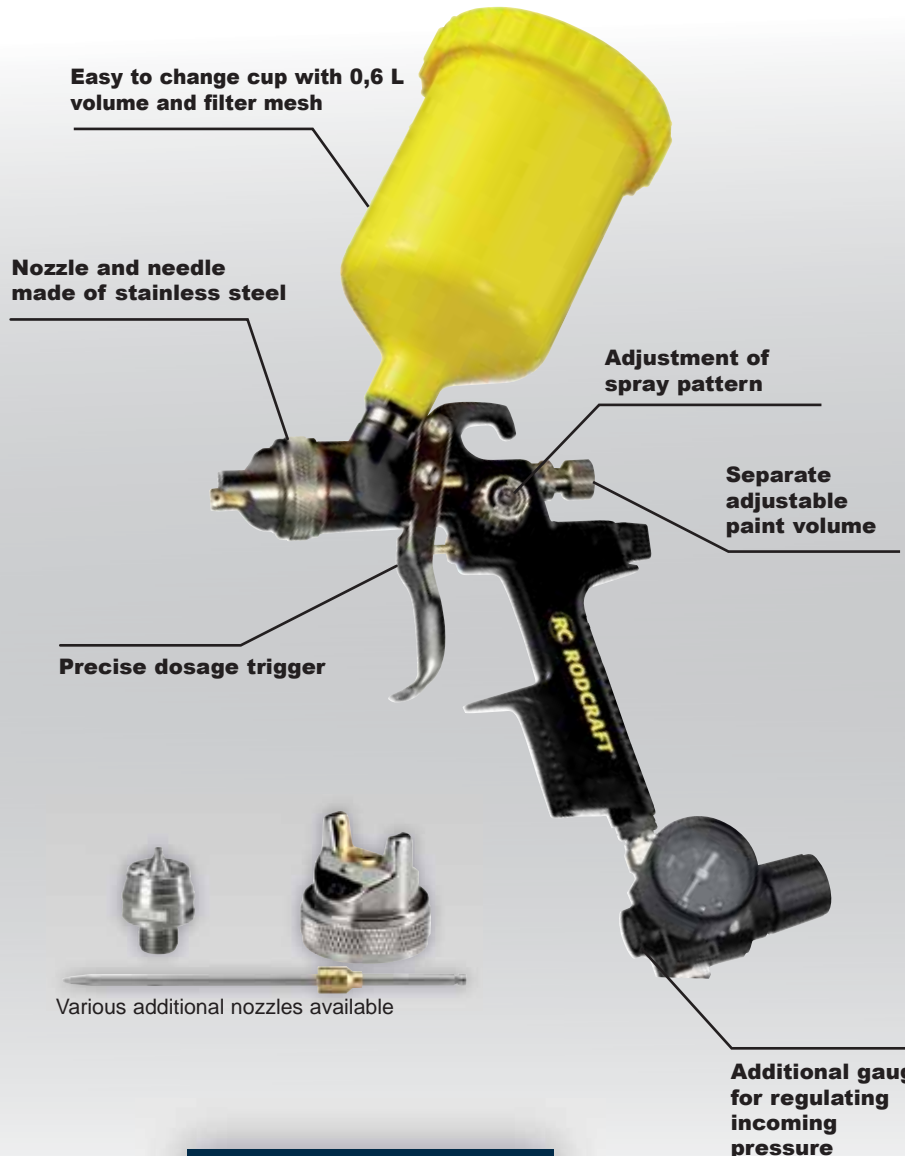

RC8106

- 01
- 02
- 03
- 04
- 05
- 06
- 07
- 08
- 09
- 10
- 11
- 12
- 13
- 14
- 15
- 16
- 17
- 18
- 19
- 20



RC8241



RFP04G

12| Miscellaneous

- | Tyre inflators
- | Sand blasters
- | Vacuum gun
- | Blow guns
- | Underbody coating guns
- | Cleaning gun
- | Cartridge gun
- | Grease guns

01

02

03

04

05

06

07

08

09

10

11

12

13

14

15


16

17

18

19

20



Model
RF02G

Part#
8951011019

| | | |
|------------------|--|-----------------|
| Model | | RF02G |
| Max. pressure | | 10 bar |
| Weight | | 0.41 kg |
| Hose | | 8 mm |
| Dimensions axbxc | | 250 mm |
| Air cons. | | 100 l/min |
| Air cons. | | 300 l/min |
| Air inlet | | 1/4" IG |
| Nozzle | | Tyre valve clip |

Model
RFP04G

Part#
8951012306

| | | |
|------------------|--|-----------------|
| Model | | RFP04G |
| Max. pressure | | 15 bar |
| Weight | | 0.65 kg |
| Hose | | 8 mm |
| Dimensions axbxc | | 250x165x70 mm |
| Air cons. | | 160 l/min |
| Air cons. | | 800 l/min |
| Air inlet | | 1/4" IG |
| Nozzle | | Tyre valve clip |

Model
RFP03DG

Part#
8951011020

| | | |
|------------------|--|-----------------|
| Model | | RFP03DG |
| Max. pressure | | 15 bar |
| Weight | | 0.69 kg |
| Hose | | 8 mm |
| Dimensions axbxc | | 245 mm |
| Air cons. | | 100 l/min |
| Air cons. | | 375 l/min |
| Air inlet | | 1/4" IG |
| Nozzle | | Tyre valve clip |

Certified tyre inflator with tyre valve clip



- Professional tyre filler with 500 mm hose and valve clip
- Pressure range 0 – 10 bar
- Certified version with analogue 60 mm gauge and anti-shock-rim
- Push-button for tyre pressure release and lever for tyre filling

Certified tyre inflator with tyre valve clip



- Pressure range 1 – 11 bar
- Certified shock-resistant version
- Easy to read, large pressure gauge (diameter 80 mm - 10 graduations per bar)
- High filling rate and long 1,5 m hose for comfortable and safe filling even of large tyres
- Equipped with a hanger
- Easy to use broad metal lever for filling and button for pressure release – measuring continuously
- Can also be used for nitrogen

Filling hose 1,5 m

8951012296


Digital



- Pressure range 0 – 12 bar
- Solid metal body
- 3-function-lever (measurement-filling-release)
- Full anti-shock rubber cover like RFG01G
- With electronic pressure sensor and digital display, very easy to read and surpassing the precision requirements of the European Union directive (0,01 bar)
- 3500 hours operation (mixed operation) with 2 x AAA batteries, with battery status indication and auto-start
- Not certifiable



SAND BLASTERS VACUUM GUN



Model RC8113
Part# 8951070023

Model RC8112
Part# 8951070003

Model RC8116
Part# 8951070004

| | |
|---------------------------|-------------------------|
| Model | RC8113 |
| Size of blasting material | 0,4 - 0,8 mm |
| Volume appr. | 1 L |
| Max. pressure | 6 - 8 min ⁻¹ |
| Weight | 0.9 kg |
| Hose | 8 mm |
| Dimensions axbxc | 255X223 mm |
| Air cons. average | 190 l/min |
| Air cons. cont. | 330 l/min |
| Nozzle | 6 mm |
| Air inlet | 1/4" AG |

For small areas with vacuum & bag



- Small sand blaster with recovery of the blasting material through self-induced suction and collection bag
- With 5 different sorts of nozzles for concave and convex corners, brush nozzle, spot blasting nozzle and nozzle for sand blasting of larger surfaces in stripes
- Includes a bottle of 0,8 kg copper slag blasting material

| | |
|---------------------------|-----------------------|
| Model | RC8112 |
| Size of blasting material | 0,4 - 0,8 mm |
| Volume appr. | 10 L |
| Max. pressure | 6.7 min ⁻¹ |
| Weight | 2.35 kg |
| Hose | 8 mm |
| Dimensions axbxc | 157x150x250x500 mm |
| Air cons. average | 170 l/min |
| Air cons. cont. | 240 l/min |
| Nozzle | 5 mm |
| Air inlet | 1/4" AG |

Portable 10 L tank



- Sand blaster for mobile use
- only with compressed air
- With portable blasting material container (10 l) and long hose (5 m) for connection of container and gun
- The blasting material has to have particle sizes 0,4 – 0,8 mm and it should be dry without clogs
- Note:
- The small hole on the fitting at the tank is always kept open for an optimum air suction flow

Accessories for RC8112

| | Part# |
|--------------------------|------------|
| Ceramic nozzle (5 pcs.): | 8951011689 |
| Gun: | 8951011690 |

| | |
|-------------------|-----------|
| Model | RC8116 |
| Max. pressure | 6 bar |
| Weight | 0.6 kg |
| Hose | 8 mm |
| Dimensions axbxc | 250 mm |
| Air cons. average | 330 l/min |
| Air cons. cont. | 480 l/min |
| Air inlet | 1/4" IG |

Vacuum System & blow gun in 1




- Removes sharp parts (shards of glass)
- Vacuums even electrically conducting dust (metal dust) or pumps water over little differences in height (emptying cars)
- Blow gun for gentle air pressure but high flow e.g. for cooling, drying
- Metal body with 4 different nozzles, suction hose and dust bag made of textile

Accessories for RC8116

| | Part# |
|-----------------------------|------------|
| Nozzle set, (flat & round): | 8951011684 |
| Brush nozzle: | 8951011688 |
| Suction hose: | 8951011683 |
| Dust bag: | 8951011686 |

01
02
03
04
05
06
07
08
09
10
11
12
13
14
15
16
17
18
19
20



Model RC8120
Part# 8951070014

Model RC8240
Part# 8955000026

| | | |
|------------------|--|------------|
| Model | | RC8120 |
| Max. pressure | | 2-15 bar |
| Weight | | 0.2 kg |
| Hose | | 8 mm |
| Dimensions axbxc | | 140x145 mm |
| Air cons. | | 130 l/min |
| Air cons. | | 190 l/min |
| Air inlet | | 1/4" IG |
| Nozzle | | 2 mm |

In aluminium



- Short and handy aluminium version
- 2 mm nozzle


| | | |
|------------------|--|------------|
| Model | | RC8240 |
| Weight | | 0.1 kg |
| Hose | | 8 mm |
| Dimensions axbxc | | 191x134 mm |
| Air cons. | | 290 l/min |
| Air cons. | | 432 l/min |
| Air inlet | | 1/4" IG |
| Sound Lpa | | 78.2 dB(A) |
| Nozzle | | 2 mm |

Soft start valve



- Made of durable high quality materials, manufactured with precision
- High air flow even at low pressure
- Tough composite housing insulates against cold air
- With soft TPR-rubber area on the lever
- Ergonomic handle-lever for reduced stress to the user
- Very sturdy air inlet with threaded brass insert

BLOW GUNS



Model Part#
RC8240S 895500009

Model Part#
RC8241 895500010

Model Part#
RC8241S 895500011

| | | |
|------------------|--|---------------|
| Model | | RC8240S |
| Weight | | 0.12 kg |
| Hose | | 8 mm |
| Dimensions axbxc | | 191x134 mm |
| Air cons. | | 220 l/min |
| Air cons. | | 329 l/min |
| Air inlet | | 1/4" IG |
| Sound Lpa | | 75.1 dB(A) |
| Nozzle | | Safety nozzle |

Safety nozzle

| | | |
|------------------|--|------------|
| Model | | RC8241 |
| Weight | | 0.13 kg |
| Hose | | 8 mm |
| Dimensions axbxc | | 191x134 mm |
| Air cons. | | 310 l/min |
| Air cons. | | 463 l/min |
| Air inlet | | 1/4" IG |
| Sound Lpa | | 79.5 dB(A) |
| Nozzle | | 4 mm |

Long tube

| | | |
|------------------|--|---------------|
| Model | | RC8241S |
| Weight | | 0.14 kg |
| Hose | | 8 mm |
| Dimensions axbxc | | 294x151 mm |
| Air cons. | | 235 l/min |
| Air cons. | | 352 l/min |
| Air inlet | | 1/4" IG |
| Sound Lpa | | 73.4 dB(A) |
| Nozzle | | Safety nozzle |

Safety nozzle



- Made of durable high quality materials, manufactured with precision
- High air flow even at low pressure
- Tough composite housing insulates against cold air
- With soft TPR-rubber area on the lever
- Ergonomic handle-lever for reduced stress to the user
- Very sturdy air inlet with threaded brass insert
- Soft safety nozzle prevents scratching painted surfaces and injuries
- More silent and powerful than standard nozzle



- Made of durable high quality materials, manufactured with precision
- High air flow even at low pressure
- Tough composite housing insulates against cold air
- With soft TPR-rubber area on the lever
- Ergonomic handle-lever for reduced stress to the user
- Very sturdy air inlet with threaded brass insert



- Made of durable high quality materials, manufactured with precision
- High air flow even at low pressure
- Tough composite housing insulates against cold air
- With soft TPR-rubber area on the lever
- Ergonomic handle-lever for reduced stress to the user
- Very sturdy air inlet with threaded brass insert
- Soft safety nozzle prevents scratching painted surfaces and injuries
- More silent and powerful than standard nozzle

- 01
- 02
- 03
- 04
- 05
- 06
- 07
- 08
- 09
- 10
- 11
- 12
- 13
- 14
- 15
- 16
- 17
- 18
- 19
- 20

BLOW PENS UNDERBODY COATING GUNS

| | | |
|----------------|--------------|---------------|
| Model | Part# | Nipple |
| RC8500 | 8951011022 | ISO 6150 B |
| RC8502 | 8951011024 | DIN 7.2 |
| RC8502N | 8951012217 | DIN 7.2 |

| | |
|---------------|--------------|
| Model | Part# |
| RC8010 | 8951070030 |

| | |
|---------------|--------------|
| Model | Part# |
| RC8011 | 8951070040 |

| | |
|------------------|-----------------|
| Model | RC8500 |
| Max. pressure | 12 bar |
| Weight | 0.02 kg |
| Hose | 8 mm |
| Dimensions axbxc | 109x10 mm |
| Air cons. | 220 l/min |
| Air cons. | 300 l/min |
| Air inlet | EURO 7.2-7.4 IG |
| Nozzle | 3 mm |

Pocket size blow gun



- Ideal personal equipment for each mechanic
- Can be kept in your pocket for quick and easy access
- Made of high resistance anodised aluminium
- With adjustable air flow (nozzle ring) and clip

| | |
|------------------|------------|
| Model | RC8010 |
| Container | 1 L |
| Weight | 0.6 kg |
| Hose | 8 mm |
| Dimensions axbxc | 250x160 mm |
| Air cons. | 210 l/min |
| Air cons. | 300 l/min |
| Air inlet | 1/4" IG |

For 1 litre bottles



- Underbody coating gun for standard 1 L containers to screw under the gun

| | |
|------------------|------------|
| Model | RC8011 |
| Container | 1 L |
| Weight | 0.8 kg |
| Hose | 8 mm |
| Dimensions axbxc | 250x160 mm |
| Air cons. | 210 l/min |
| Air cons. | 300 l/min |
| Air inlet | 1/4" IG |

For 1 litre bottles



- Underbody coating gun for standard 1 L containers to screw under the gun
- Including 2 nozzles & suction tubes

Different nipple profiles are available:

| | |
|---------------|----------------------------|
| RC8500 | ISO 6150 B (MIL-C-4109) |
| RC8501 | ISO 6150 C (Stäubli) |
| RC8502 | DIN 7.2-7.4 (Euro profile) |
| RC8503 | British (PCL) |
| RC8504 | ARO 210 (Orion) |

Accessories for RC8010

| | |
|---------|---------------------|
| Nozzle: | Part# 8951011694 |
|---------|---------------------|







Accessories for RC8011

| | |
|-------------------------|---------------------|
| Nozzle+tube (3 pieces): | Part# 8951011679 |
|-------------------------|---------------------|

Model RC8035
Part# 8951070050

Model RC8115
Part# 8951070034










Model RC8000
Part# 8951070000

| | |
|------------------|--|
| Model | RC8035 |
| Container | 1 L |
| Weight |  0.4 kg |
| Hose |  8 mm |
| Dimensions axbxc | 250x180 mm |
| Air cons. |  230 l/min average |
| Air cons. |  330 l/min cont. |
| Nozzle |  5 mm |
| Air inlet |  1/4" IG |

4 in 1 gun










- One gun for multiple applications:
 1. underbody coating gun. For standard 1 l bottles / cans with thread
 2. cavity coating gun. With long nozzle tube for 1 l containers
 3. cleaning gun. Using the 1 l tank and the long nozzle tube with adjustable nozzle ring
 4. disinfection gun. For air conditioning systems and air channels in the car when using the tank and the long nozzle hose

| | |
|------------------|--|
| Model | RC8115 |
| Volume appr. |  1 L |
| Max. pressure |  2-15 bar |
| Weight |  0.5 kg |
| Hose |  8 mm |
| Dimensions axbxc |  374x200 mm |
| Air cons. |  230 l/min average |
| Air cons. |  330 l/min cont. |
| Air inlet |  1/4" IG |
| Nozzle |  5 mm |

Cleaning gun



- Cleaning spray gun
- With long nozzle tube
- Adjustable spraying nozzle
- Including 1 l tank

| | |
|------------------|--|
| Model | RC8000 |
| Cartridge |  50 x 220 (310 ml) |
| Weight |  1.1 kg |
| Hose |  8 mm |
| Dimensions axbxc |  305x167 mm |
| Air cons. |  0.8 l/min |
| Air inlet |  1/4" IG |
| Vibration |  < 2.5 m/s ² |


Steel version



- Robust cartridge gun with steel cylinder for cartridges up to 310 ml and up to a size of 220 x 50 mm
- Adjustable air flow and pressure release valve for precise stopping of the material flow without dropping
- For sealants, silicones, one component glues, cements, fillers, grease in aluminium, cardboard and plastic cartridges

01
02
03
04
05
06
07
08
09
10
11
12
13
14
15
16
17
18
19
20

GREASE GUNS



Model Part#
RC8118 8951011018

| | |
|------------------|-----------|
| Model | RC8118 |
| Volume appr. | 0.6 Liter |
| Max. pressure | 9 bar |
| Weight | 0.15 kg |
| Hose | 8 mm |
| Dimensions axbxc | 263x35 mm |
| Nozzle | mini |

Refillable spray can 0,6 L



- Spray bottle that can be refilled and recharged with compressed air
- With safety valve and fitting to fill
- Can be refilled with solvents, corrosion protection, lubricants and cleaners or simply with clean compressed air for using it like a blow gun for cleaning
- Max. pressure 9 bar
- Includes 4 different nozzle heads
- The ecological alternative

Accessories for RC8118

| | |
|-------------------|------------|
| | Part# |
| Nozzle set 4 pcs: | 8951011697 |
| Spray head | 8951011698 |

Model Part#
RC8132 8951000059

| | |
|-------------------------------------|--------------|
| Model | RC8132 |
| Output pressure (Compression ratio) | 170 bar |
| Flow rate | 0.4 g/stroke |
| Max. pressure | 8 bar |
| Weight | 1.53 kg |
| Hose | 8 mm |
| Dimensions axbxc | 264x328 mm |
| Air cons. | 3 l / hub |
| Air cons. | 3 l / hub |
| Air inlet | 1/4" IG |

Single stroke cartridges & loose grease



- Grease gun for cartridges 215 x 50 mm and for loose grease (max. 400 ml)
- Single stroke output
- Only a small portion of grease is pressed out with every push (appr. 4g)
- Delivery includes a rigid nozzle
- Tube l = 116 mm and a high-pressure flexible
- Hose l = 270 mm
- Nose: M10x1,0

Model Part#
RC8141 8951070090

| | |
|-------------------------------------|--------------------------------------|
| Model | RC8141 |
| Output pressure (Compression ratio) | 260 bar |
| Flow rate | 64 cm ³ /min continuously |
| Max. pressure | 8 bar |
| Weight | 1.6 kg |
| Hose | 8 mm |
| Dimensions axbxc | 260x328 mm |
| Air cons. | 90 l/min |
| Air cons. | 110 l/min |
| Air inlet | 1/4" IG |

Continuously cartridges & loose grease



- Grease gun with cold-insulated handle
- For cartridges 215 x 50 mm (400 ml) but also for loose grease
- Delivers grease continuously as long as the trigger is pushed
- Includes a rigid nozzle tube and a high-pressure flexible
- Hose (c = 225 mm)
- Nose: M10x1,0

13 | Accessories

Magnetic dishes

Ideal storage for small parts e.g. screws, nuts etc. Applicable in every position including overarm. All magnetic dishes are made of stainless steel. Magnets with rubber cover to avoid scratches.

Round



Model Part#
MAGT1 8951011488

| | |
|--------------|----------|
| Dimension | ø 150 mm |
| Magnet diam. | 63 mm |
| Weight | 0,3 kg |

Short, square



Model Part#
MAGT2 8951011489

| | |
|--------------|--------------|
| Dimensions | 240 x 140 mm |
| Magnet diam. | 2 x 83 mm |
| Weight | 0,67 kg |

Long, square



Model Part#
MAGT3 8951011490

| | |
|--------------|--------------|
| Dimensions | 360 x 160 mm |
| Magnet diam. | 3 x 83 mm |
| Weight | 0,99 kg |

Silencing exhaust hose systems (DUS)



DUS hoses are a system existing of an air supplying hose for the tool and an overlying hose which deflects the outgoing air from the operator and prevents oil and coldness.

| Hose system | Part# |
|-------------|------------|
| DUS 20 | 8951011866 |
| DUS 21 | 8951011867 |
| DUS 23 | 8951011869 |
| DUS 24 | 8951011870 |
| DUS 25 | 8951011871 |
| DUS 26 | 8951011872 |
| DUS 28 | 8951011874 |
| DUS 35 | 8955000015 |

Tools with "RE" in the model name are already equipped with a DUS exhaust system.

Maintenance units (5 micron)

With aluminium frame and composite bowls, the new range of RC FRLs is the right product to increase the tool's life. The standard 5 microns filter will guarantee that no impurities dust or water will reach your tool. The semi automatic filter makes it very easy to clean your system whenever you want. The screwed gauge is well protected against impact and is always at the right position.

| Port Size | 1/4" |
|--------------------------|----------------------|
| BSP Part Number | 8951000162 |
| Body Material | Aluminum die-cast |
| Bowl Material | Polycarbonate |
| Filtration | 5 microns |
| Proof pressure | 15 bar |
| Max air flow (l/min) | 2080 |
| Filter bowl capacity | 105 ml |
| Lubricator bowl capacity | 125 ml |
| Drain | Semi automatic drain |
| Weight | 2 kg |



| Port Size | 1/2" |
|--------------------------|----------------------|
| BSP Part Number | 8951000164 |
| Body Material | Aluminum die-cast |
| Bowl Material | Polycarbonate |
| Filtration | 5 microns |
| Proof pressure | 15 bar |
| Max air flow (l/min) | 2600 |
| Filter bowl capacity | 105 ml |
| Lubricator bowl capacity | 125 ml |
| Drain | Semi automatic drain |
| Weight | 2 kg |

01

02

03

04

05

06

07

08

09

10

11

12

13

14

15

16


17

18

19

20

Clean air, clean work

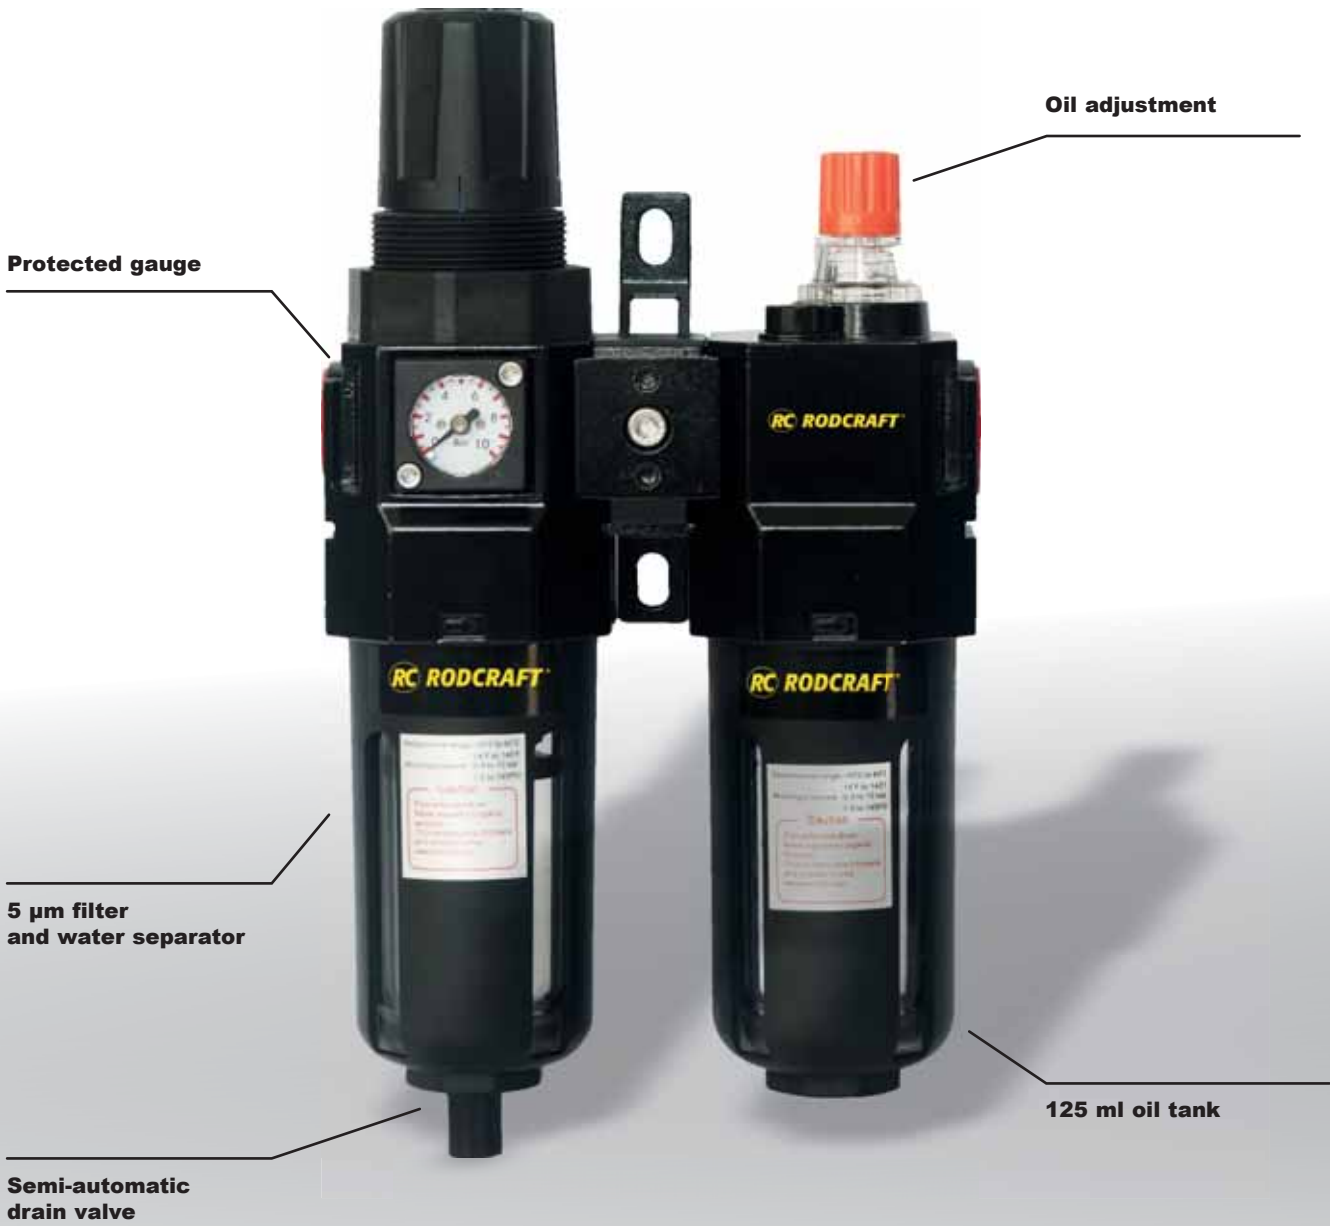

FRL

Hose reels

SAR21
SAR31
ø hose 8 mm



Movable retaining Ball
Allows easy adjustment of leader hose to desired length

Ratchet Spring
Provides easy locking and retracting of hose

Swivel-plate Bracket
Allows 180° movement for easier hose handling

Multi Directional Swivel-Inlet
Easy connection on the fixed pipe

SAR22
SAR32
ø hose 10 mm



| Model | SAR21 (BSP) |
|---------------|--------------|
| Part Number | 8951000148 |
| Hose diameter | 8 mm (5/16") |
| Material | Composite |
| Type | Closed |
| Thread | 1/4" |
| Hose Length | 10 m |

| Model | SAR31 (BSP) |
|---------------|--------------|
| Part Number | 89510000150 |
| Hose diameter | 8 mm (5/16") |
| Material | Aluminum |
| Type | Closed |
| Thread | 1/4" |
| Hose Length | 10 m |

| Model | SAR22 (BSP) |
|---------------|--------------|
| Part Number | 8951000149 |
| Hose diameter | 10 mm (3/8") |
| Material | Composite |
| Type | Closed |
| Thread | 3/8" |
| Hose Length | 16 m |

| Model | SAR32 (BSP) |
|---------------|--------------|
| Part Number | 8951000151 |
| Hose diameter | 10 mm (3/8") |
| Material | Aluminum |
| Type | Closed |
| Thread | 3/8" |
| Hose Length | 16 m |

Power regulator¹²



| Model | AR1 | Part# | 8951011858 |
|-------|---------|-------|------------|
| In | 1/4" IG | | |
| Out | 1/4" AG | | |

Swivel air joint¹



| Model | DG1 | Part# | 8951011859 |
|-------|---------|-------|------------|
| In | 1/4" IG | | |
| Out | 1/4" AG | | |

Inline lubricator¹



| Model | G1K | Part# | 8951011851 |
|-------|---------|-------|-----------------|
| In | 1/4" IG | | capacity = 4 ml |
| Out | 1/4" AG | | |

| Model | G1G ³ | Part# | 8951011852 |
|-------|------------------|-------|------------------|
| In | 1/4" IG | | capacity = 28 ml |
| Out | 1/4" AG | | |

| Model | G2 ³ | Part# | 8951011853 |
|-------|-----------------|-------|------------------|
| In | 3/8" IG | | capacity = 28 ml |
| Out | 3/8" IG | | |

| Model | G3 ³ | Part# | 8951011854 |
|-------|-----------------|-------|------------------|
| In | 1/2" AG | | capacity = 28 ml |
| Out | 1/2" AG | | |

| Model | G1M | Part# | 8951011856 |
|-------|---------|-------|------------------|
| In | 1/4" IG | | capacity = 12 ml |
| Out | 1/4" AG | | |

Inline filter¹



| Model | F1G | Part# | 8951011855 |
|-------|---------|-------|------------|
| In | 1/4" IG | | |
| Out | 1/4" AG | | |

¹ For connection into tool air inlet

² Reduces power and speed

³ Adjustable

01

02

03

04

05

06

07

08

09

10

11

12

13

14

15

16

17

18

19

20

Lubricants for air tools



0.6 litre air lubrication "Protecto-lube"
Part# 8951000290

0.6 litre Impact system oil type SAE30
Part# 8951000331

Grease gun, filled



Model **RC8150F** Part# 8951012205
grease gun, filled
Dimensions 168x34mm

Grease gun + cartridges



Model **RC8150** Part# 8951012204
grease gun, incl. 2 cartridges
Dimensions 168x34mm

Cartridges



Model **RC8150K** Part# 8951012206
5 filled cartridges
for model 8150F

PE air hoses




| | | | |
|-----------------------|------------------------|------------|------------|
| Part#: | 8951011831 | 8951011833 | 8951011835 |
| Work length | 5 m | 8 m | 10 m |
| Material: | Polyethylene PE | | |
| Diameter: | 8x10mm (inner x outer) | | |
| Fittings: | Euro-coupling / plug | | |
| Working pressure max. | 15 bar | | |

PUR air hoses



| | | | |
|-------------|------------------------|------------|------------|
| Part# | 8951011842 | 8951011843 | 8951011844 |
| Work length | 4 m | 6 m | 8 m |
| Material | Polyurethane PUR | | |
| Diameter | 8x12mm (inner x outer) | | |
| Fittings | Euro-coupling / plug | | |

PUR air hoses



| | | |
|-------------|------------------|------------|
| Part# | 8951011845 | 8951011847 |
| Work length | 6 m | 4 m |
| Material | Polyurethane PUR | |
| Diameter | 6,5 x 10 mm | 8 x 12 mm |
| Fittings | 1/4" AG | 3/8" AG |

| | | |
|--------------|------------------|------------|
| Part# | 8951011846 | 8951011848 |
| Work length: | 6 m | 8 m |
| Material | Polyurethane PUR | |
| Diameter | 8 x 10 mm | 8 x 12 mm |
| Fittings | 3/8" AG | 3/8" AG |

PVC 50 m air hose



| | | |
|--------------|-----------------------|------------|
| Part# | 8951011836 | 8951011837 |
| Work length | 50 m | |
| Material | Polyvinylchloride PVC | |
| Diameter | 9 x 15 mm | 13 x 21 mm |
| Fittings | ./. | |
| Max pressure | 12 bar | |

Balancers & hose balancers

- Stainless steel cable
- The stroke can be limited in retraction for optimum position to grab the load - simple adjustable clamp
- Cable runs in low friction material
- Fast and easy exchange of the spring package due to modular design
- Robust casted aluminium body (closed two piece construction (see A))
- Precisely adjustable balancing force (spring tension) for minimum pull resistance (grabbing) and easy setting of the balancing point
- With additional safety suspension

Info:

- A aluminium casted body (closed two piece construction), upper suspension with safety hook running on ball bearing, tapered drum with ball bearing for even pull force for balancing effect over full stroke after grabbing the load
- B equipped with a safety lock system against drop in case of a spring breakage (for capacities over 3 kg minimum load)
- C permanently visible cable for fast security checks
hook on upper suspension can be aligned
- Stop system to position the load at any height ("STOP")



Balancers

| Model | Part#: | Capacity kg | Stroke mm | Info |
|-------|------------|-------------|-----------|------|
| 9311 | 8951011260 | 0,4-1,0 | 1600 | |
| 9312 | 8951011261 | 1,0-2,0 | 1600 | |
| 9313 | 8951011262 | 2,0-3,0 | 1600 | |
| 9320 | 8951011263 | 1,0-2,5 | 2000 | B |
| 9321 | 8951011264 | 2,0-4,0 | 2000 | B |
| 9322 | 8951011265 | 4,0-6,0 | 2000 | B |
| 9323 | 8951011266 | 6,0-8,0 | 2000 | B |
| 9336 | 8951011267 | 2,0-4,0 | 2500 | B |
| 9337 | 8951011268 | 4,0-6,0 | 2500 | B |
| 9338 | 8951011269 | 6,0-8,0 | 2500 | B |
| 9339 | 8951011270 | 8,0-10,0 | 2500 | B |
| 9340 | 8951011271 | 10,0-14,0 | 2500 | B |



Balancers

| Model | Part#: | Capacity kg | Stroke mm | Info |
|-------|------------|-------------|-----------|------|
| 9354 | 8951011276 | 4,0-7,0 | 2000 | A,B |
| 9355 | 8951011277 | 7,0-10 | 2000 | A,B |
| 9356 | 8951011278 | 10-14 | 2000 | A,B |
| 9357 | 8951011279 | 14-18 | 2000 | A,B |
| 9358 | 8951011280 | 18-22 | 2000 | A,B |
| 9364 | 8951011285 | 25-30 | 2000 | A,B |
| 9366 | 8951011287 | 35-45 | 2000 | A,B |
| 9367 | 8951011288 | 45-55 | 2000 | A,B |
| 9369 | 8951011290 | 65-75 | 2000 | A,B |



Balancers with stop function

| Model | Part#: | Capacity kg | Stroke mm | Info |
|-------|------------|-------------|-----------|------|
| 9346 | 8951011272 | 2,0-4,0 | 2500 | B,C |
| 9347 | 8951011273 | 4,0-6,0 | 2500 | B,C |
| 9348 | 8951011274 | 6,0-8,0 | 2500 | B,C |
| 9349 | 8951011275 | 8,0-10 | 2500 | B,C |



Hose balancers

| Model | Part#: | Capacity kg | Stroke mm | Thread |
|-------|------------|-------------|-----------|--------|
| 9200 | 8951011256 | 0,7-0,8 | 1350 | 1/4" |
| 9201 | 8951011257 | 0,75-1,5 | 1350 | 1/4" |
| 9202 | 8951011258 | 1,2-2,5 | 1350 | 1/4" |



hoses made of polyurethane (hose instead of a cable) / 8 bar max. operating pressure / outer hose diameter 7,8 mm

01

02

03

04

05

06

07

08

09

10

11

12

13

14

15

16

17

18


19

20

Safety series 7.2 mm (Euro-profile)

Patented Composite - Safety Couplings (EURONORM and ISO safety standard)

- Robust design with low weight
- Safety system (2 movements with pressure release)
- Very high flow rate (even at 6,3 bar using 7,2 mm diameter series approx. 1700 l/min)
- New technology: extremely air proof, low force coupling, reduced danger of scratching paint due to composite elements, industrial gasket system with nitrile O-rings
- Excellent material quality: shock resistant, low wear, squeeze-proof design
- 10 times higher life time than standard couplings
- Galvanised steel thread fittings, male threads ready to seal with teflon coating
- Plug made of steel with anti-stain coating, male threads ready to seal with teflon coating
- Several plug-coupling profiles available EURO/DIN 7.2 mm - 7.4 mm, SO 6150 B, MIL 409 C (6 mm) and 8 mm high-flow format
- With check valve

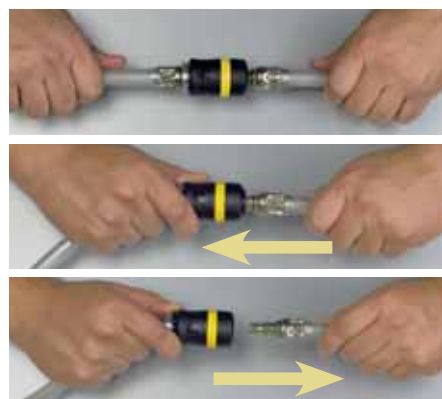

Safety System

First step:
the valve stops the air flow, pressure is released from plug side of the air line i.e. no danger of lashing out hose tails (pull)

Second step:
complete separation of the connection without pressure (press) i.e. no danger

Coupling with thread



| Model | Dimension | Part#: |
|-------|-----------|------------|
| SK703 | 1/2" AG | 8951011742 |
| SK704 | 1/4" IG | 8951011743 |
| SK705 | 3/8" IG | 8951011744 |
| SK706 | 1/2" IG | 8951011745 |

AG = outer thread
IG = inner thread

Diverter with couplings



| Model | Dimension | Part#: |
|-------|-----------|------------|
| SK760 | 1/4" IG | 8951011762 |
| SK761 | 3/8" IG | 8951011763 |
| SK762 | 1/2" IG | 8951011764 |

Plug for hoses




| Model | ø Hose inner | Part#: |
|-------|--------------|------------|
| SK716 | ø 6 - 7 mm | 8951011751 |
| SK718 | ø 8 mm | 8951011752 |
| SK719 | ø 9 mm | 8951011753 |
| SK720 | ø 10 mm | 8951011754 |

Coupling for hoses



| Model | Dimension | Part#: |
|-------|-------------|------------|
| SK707 | ø 6 - 7 mm | 8951011746 |
| SK708 | ø 8 mm | 8951011747 |
| SK709 | ø 9 - 10 mm | 8951011748 |
| SK713 | ø 13 mm | 8951011750 |


Plug with thread



| Model | Dimension | Part#: |
|-------|-----------|------------|
| SK728 | 1/4" AG | 8951011756 |
| SK729 | 3/8" AG | 8951011757 |
| SK730 | 1/2" AG | 8951011758 |
| SK731 | 1/4" IG | 8951011759 |
| SK732 | 3/8" IG | 8951011760 |
| SK734 | 1/2" IG | 8951011761 |

Brass claw couplings

For very high flow rates (use valve upstream for safety, does not contain a check valve) typical for air connections to construction site compressors



Coupling with thread

| Model | Dimension | Part#: |
|--------|-----------|------------|
| KKG1/2 | 1/2" AG | 8951011816 |
| KKG3/4 | 3/4" AG | 8951011817 |



AG = outer thread
IG = inner thread

Brass standard 7,2 mm

Solid version with high flow rate for daily use
With check valve

Coupling with thread



| Dimension | Part#: |
|-------------|------------|
| BSP 1/4" AG | 8951011784 |
| BSP 3/8" AG | 8951011785 |
| BSP 1/2" AG | 8951011786 |
| BSP 1/4" IG | 8951011787 |
| BSP 3/8" IG | 8951011788 |
| BSP 1/2" IG | 8951011789 |

Coupling for hoses



| Dimension | Part#: |
|-------------|------------|
| ø 6 - 7 mm | 8951011790 |
| ø 9 - 10 mm | 8951011791 |
| ø 13 mm | 8951011792 |

Diverter with coupling



| Dimension | Part#: |
|---------------|------------|
| 3/8" IG 2-Weg | 8951011819 |
| 3/8" IG 3-Weg | 8951011820 |

Plug for hoses




| ø Hose inner | Part#: |
|--------------|------------|
| ø 6 - 7 mm | 8951011795 |
| ø 9 mm | 8951011796 |
| ø 13 mm | 8951011797 |

Plug with thread



| Dimension | Part#: |
|---------------------|------------|
| BSP 1/4" AG (Steel) | 8951011808 |
| BSP 1/4" AG | 8951011809 |
| BSP 3/8" AG | 8951011810 |
| BSP 1/2" AG | 8951011811 |
| BSP 1/4" IG | 8951011812 |
| BSP 3/8" IG | 8951011813 |
| BSP 1/2" IG | 8951011814 |

Hose stems



| Dimension | ø Hose inner | Part#: |
|-------------|--------------|------------|
| BSP 1/4" AG | 6 mm | 8951011801 |
| BSP 1/4" AG | 9 mm | 8951011802 |
| BSP 3/8" AG | 9 mm | 8951011803 |
| BSP 3/8" AG | 13 mm | 8951011804 |
| BSP 1/2" AG | 13 mm | 8951011805 |
| BSP 1/2" AG | 9 mm | 8951011806 |

Threaded connectors



| Dimension 1 | Dimension 2 | Part#: |
|-------------|-------------|------------|
| 1/4" AG | 1/4" AG | 8951011822 |
| 3/8" AG | 1/4" AG | 8951011824 |
| 3/8" AG | 3/8" AG | 8951011821 |
| 1/2" AG | 3/8" AG | 8951011825 |
| 1/2" AG | 1/2" AG | 8951011827 |
| 3/8" AG | 1/4" IG | 8951011823 |
| 1/2" AG | 3/8" IG | 8951011828 |
| 1/2" AG | 1/4" IG | 8951011839 |

Hose connector



| Dimension | inner hose ø | Part#: |
|-----------|--------------|------------|
| ø 6 mm | 6 mm | 8951011798 |
| ø 9 mm | 9 mm | 8951011799 |
| ø 13 mm | 13 mm | 8951011800 |

01
02
03
04
05
06
07
08
09
10
11
12
13
14
15
16
17
18
19
20



www.linkedin.com/company/rodcraft

Visit www.rodcraft.com for more product information
or contact your local distributor:

